


GF Hycleen AS flush valve LegioTherm K DN15

1149719

- Temperature: max. 90°C
- Nominal pressure: PN10
- Material: gunmetal lead-free, stainless steel, EPDM
- Factory setting: 20°C (adjustable 0 - 90°C)
- Connection: screw connection
- Note: Flushing valve JRG LegioTherm K must not be used without the consent of the holder of patents EP 1 845 207 B1 and DE 10 2006 017 807 B4 for use in a water system of the type described in these patents.

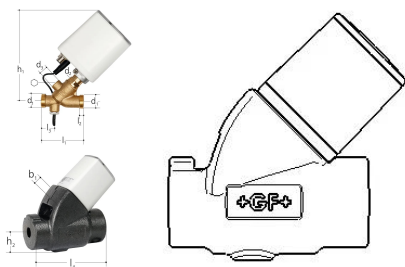

About GF Hycleen AS flush valve LegioTherm K

Specification

- Balancing valves: DN 15, 20, 25
- Flush valves: DN 15 & 20
- Central control interface with touch-screen
- Operating pressure: to 10 bar
- Operating temperature: +5°C to +90°C
- Materials: Gunmetal, Stainless steel, Plastics

Application

- Balancing of potable water hot circulation systems
- Ensure water exchange in potable water hot & cold pipe sections
- For buildings with complex water installations
- Ideal for retro-fit where existing installations experience poor hot water supply to outlets

GF Hycleen AS flush valve LegioTherm K DN15

1149719



Status

Item Available From date 2026-03-01

Product code

Item no EAN 7613263104496

Item no GF 351110600

Item no GTIN 07613263104496

Item no LVI 2075249

Item no RSK 4883144

Dimensions

Item Unit Height 158

Item Unit Length 296

Item Unit Weight 0,81

Item Unit Width 175

Item_UOM pce

Measurements

Length (l1) 75

Length (l2) 6

Length (l3) 24

Z Measurement h1 162

Z Measurement h2 50

Packaging

Packaging GTIN PL1 06414900170918

Packaging Height PL1 158

Packaging Length PL1 296

Packaging Quantity PL1 1

Packaging Type PL1 Plastic_Bag

Packaging Volume PL1 0,0081844

Packaging Weight PL1 0,978

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb