Product data sheet




GF Hycleen AS balancing valve LegioTherm 2T DN25

1149724

- Temperature: max. 90°C
- Nominal pressure: PN10
- Material: gunmetal lead-free, stainless steel, EPDM
- Factory setting: 57°C (adjustable 0 - 90°C) thermal disinfection 70°C (adjustable 60 - 90°C)
- Connection: screw connection





About GF Hycleen AS balancing valve LegioTherm 2T

Specification


- Balancing valves: DN 15, 20, 25
- Flush valves: DN 15 & 20
- Central control interface with touch-screen
- Operating pressure: to 10 bar
- Operating temperature: +5°C to +90°C
- Materials: Gunmetal, Stainless steel, Plastics

Application

- Balancing of potable water hot circulation systems
- Ensure water exchange in potable water hot & cold pipe sections
- For buildings with complex water installations
- Ideal for retro-fit where existing installations experience poor hot water supply to outlets

GF Hycleen AS balancing valve LegioTherm 2T DN25

1149724

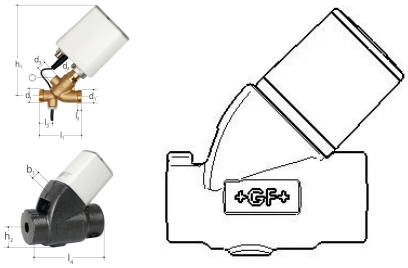

Status

Item Available From date	2026-03-01

Product code

Item no EAN	7613263105486
Item no GF	351110630
Item no GTIN	07613263105486
Item no LVI	2022352
Item no RSK	4883182

Dimensions

Item Unit Height	180
Item Unit Length	300
Item Unit Weight	1,4
Item Unit Width	200
Item_UOM	pce

Measurements

Length (l1)	99
Length (l2)	8
Length (l3)	24
Length L4	233
Z Measurement b1	100
Z Measurement d1	1,25
Z Measurement d2	1
Z Measurement d3	Rp1/4"
Z Measurement h1	179
Z Measurement h2	56

Packaging

Packaging GTIN PL1	06414900170963
Packaging Height PL1	180
Packaging Length PL1	310
Packaging Quantity PL1	1
Packaging Type PL1	Base_Box
Packaging Volume PL1	0,01116
Packaging Weight PL1	1,579
Packaging Width PL1	200

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+