


GF Hycleen AS balancing valve LegioTherm 2T DN25

1149724

- Temperature: max. 90°C
- Nominal pressure: PN10
- Material: gunmetal lead-free, stainless steel, EPDM
- Factory setting: 57°C (adjustable 0 - 90°C) thermal disinfection 70°C (adjustable 60 - 90°C)
- Connection: screw connection

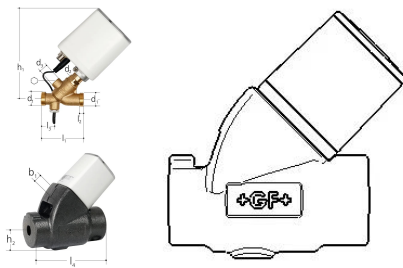

About GF Hycleen AS balancing valve LegioTherm 2T

Specification


- Balancing valves: DN 15, 20, 25
- Flush valves: DN 15 & 20
- Central control interface with touch-screen
- Operating pressure: to 10 bar
- Operating temperature: +5°C to +90°C
- Materials: Gunmetal, Stainless steel, Plastics

Application

- Balancing of potable water hot circulation systems
- Ensure water exchange in potable water hot & cold pipe sections
- For buildings with complex water installations
- Ideal for retro-fit where existing installations experience poor hot water supply to outlets

GF Hycleen AS balancing valve LegioTherm 2T DN25

1149724

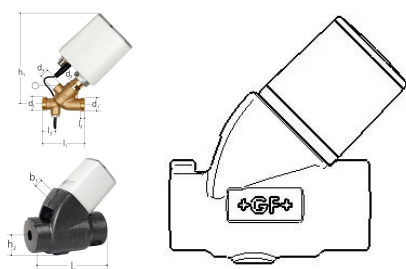

Status

Item Available From date 2026-03-01

Product code

Item no EAN 7613263105486

Item no GF 351110630

Item no GTIN 07613263105486

Item no LVI 2022352

Item no RSK 4883182

Dimensions

Item Unit Height 180

Item Unit Length 300

Item Unit Weight 1,4

Item Unit Width 200

Item_UOM pce

Measurements

Length (l1) 99

Length (l2) 8

Length (l3) 24

Z Measurement h1 179

Z Measurement h2 56

Packaging

Packaging GTIN PL1 06414900170963

Packaging Height PL1 180

Packaging Length PL1 310

Packaging Quantity PL1 1

Packaging Type PL1 Base_Box

Packaging Volume PL1 0,01116

Packaging Weight PL1 1,57921190774271

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb