
Product data sheet



GF Hycleen AS Master EU

1149728

- Description: Master for max. 50 Hycleen AS Controller
- Consisting of: touchscreen 10.1", power supply
- 2 plugs M12 for 2x 300m cable (500m with powerbox)
- 2 Rj45 jacks (Ethernet), 2 USB connections (read/write)
- USB jack (read only), relay output
- Screw set

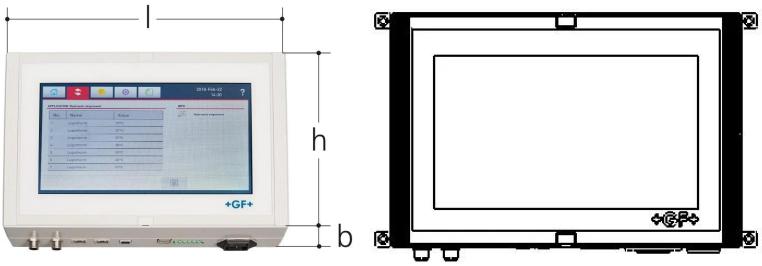

About GF Hycleen AS Master

Specification


- Balancing valves: DN 15, 20, 25
- Flush valves: DN 15 & 20
- Central control interface with touch-screen
- Operating pressure: to 10 bar
- Operating temperature: +5°C to +90°C
- Materials: Gunmetal, Stainless steel, Plastics

Application

- Balancing of potable water hot circulation systems
- Ensure water exchange in potable water hot & cold pipe sections
- For buildings with complex water installations
- Ideal for retro-fit where existing installations experience poor hot water supply to outlets

GF Hycleen AS Master EU

1149728

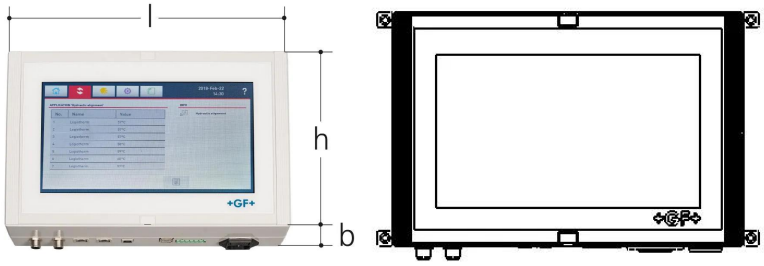

Product code

Item no EAN	7613263106049
Item no GF	351110656
Item no GTIN	07613263106049
Item no LVI	2075252
Item no RSK	4893319

Dimensions

Item Unit Height	300
Item Unit Length	400
Item Unit Weight	2,3
Item Unit Width	400
Item_UOM	pce

Measurements

LENGTH_L	326
Z Measurement b	84
Z Measurement h	214

Packaging

Packaging GTIN PL1	06414900171045
Packaging Height PL1	300120
Packaging Length PL1	400
Packaging Quantity PL1	1
Packaging Type PL1	Base_Box
Packaging Volume PL1	48,0192
Packaging Weight PL1	2,4
Packaging Width PL1	400

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+