


GF Hycleen AS temperature sensor with valve DN20

1149732

- Description: Temperature sensor PT 1000 with valve
- Temperature: max. 90°C
- Material: gunmetal
- Connection: screw connection, cable plug M8

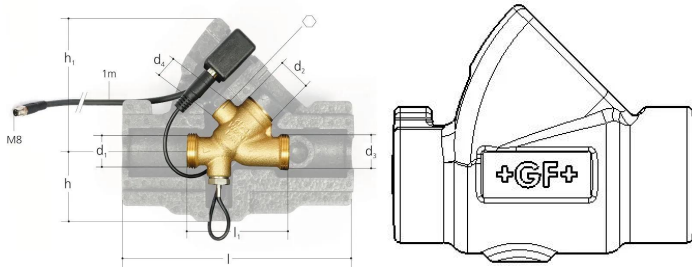

About GF Hycleen AS temperature sensor with valve

Specification


- 30 V DC power supplies for Hycleen Balance and Flush systems
- Communication and extension cables with M8 push-pull connectors
- BMS connection via Modbus RTU
- Temperature sensors PT1000 and 4–20 mA sensor adapters
- Flow sensors and drain surveillance sensors
- Insulation shells made of EPP for DN15 and DN20 valves
- Sensor extension cables and spare sensor components

Application

- Power supply and electrical connection of Hycleen Balance and Flush systems
- Communication and bus extension between Hycleen components
- Integration with building management systems (BMS)
- Temperature, flow, and leakage monitoring in drinking water installations
- Protection, insulation and installation support of hygiene flushing valves

GF Hyclean AS temperature sensor with valve DN20

1149732

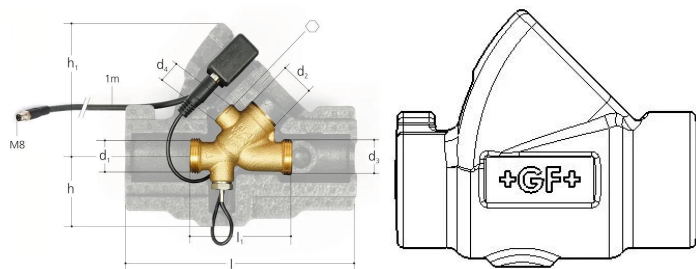

Status

Item Available From date

2026-03-01

Product code

Item no EAN

7613263107022

Item no GF

351110661

Item no GTIN

07613263107022

Item no LVI

2022354

Item no RSK

4883178

Dimensions

Item Unit Height

110

Item Unit Length

220

Item Unit Weight

0,57

Item Unit Width

200

Item_UOM

pce

Measurements

Length (l1)

87

Z Measurement h

52

Z Measurement h1

168

Packaging

Packaging GTIN PL2

06414900134217

Packaging Height PL2

178

Packaging Length PL2

242

Packaging Quantity PL2

1

Packaging Type PL2

Medium_Box

Packaging Volume PL2

0,0075383

Packaging Weight PL2

0,7

Packaging Width PL2

175

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb