


## GF Hycleen temperature sensor with valve DN20

**1149732**

- Description: Temperature sensor PT 1000 with valve
- Temperature: max. 90°C
- Material: gunmetal
- Connection: screw connection, cable plug M8

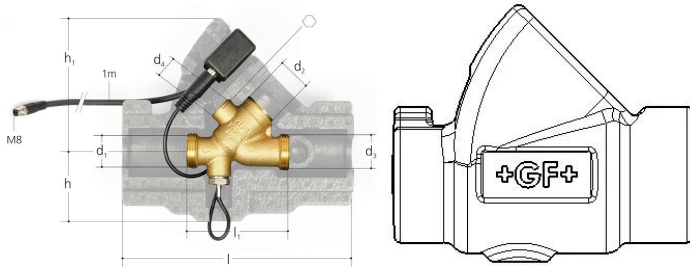

### About GF Hycleen temperature sensor with valve

#### Specification


- 30 V DC power supplies for Hycleen Balance and Flush systems
- Communication and extension cables with M8 push-pull connectors
- BMS connection via Modbus RTU
- Temperature sensors PT1000 and 4–20 mA sensor adapters
- Flow sensors and drain surveillance sensors
- Insulation shells made of EPP for DN15 and DN20 valves
- Sensor extension cables and spare sensor components

#### Application

- Power supply and electrical connection of Hycleen Balance and Flush systems
- Communication and bus extension between Hycleen components
- Integration with building management systems (BMS)
- Temperature, flow, and leakage monitoring in drinking water installations
- Protection, insulation and installation support of hygiene flushing valves

## GF Hycleen temperature sensor with valve DN20

1149732

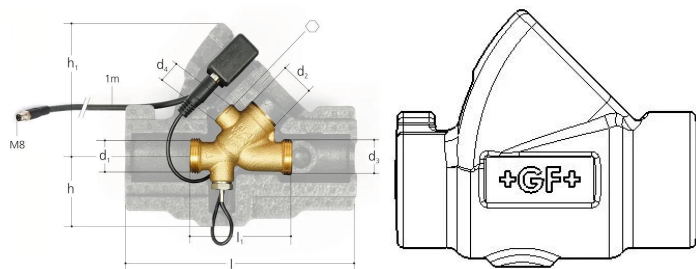

### Status

Item Available From date

2026-03-01

### Product code

Item no EAN

7613263107022

Item no GF

351110661

Item no GTIN

07613263107022

Item no LVI

2022354

Item no RSK

4883178

### Dimensions

Item Unit Height

110

Item Unit Length

220

Item Unit Weight

0,57

Item Unit Width

200

Item\_UOM

pce

### Measurements

Length (l1)

87

Z Measurement h

52

Z Measurement h1

168

### Packaging

Packaging GTIN PL2

06414900134217

Packaging Height PL2

178

Packaging Length PL2

242

Packaging Quantity PL2

1

Packaging Type PL2

Medium\_Box

Packaging Volume PL2

0,0075383

Packaging Weight PL2

0,7

Packaging Width PL2

175

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)