Product data sheet



GF Hycleen AS Relay cable Uni Controller 5m

1149734

- Cable to connect the Uni Controller relay connector (24V/230V)
- with actuators controlled via the actuator automation application.
- Connection: RD24 plug, female



About GF Hycleen AS Relay cable Uni Controller

Specification


- Balancing valves: DN 15, 20, 25
- Flush valves: DN 15 & 20
- Central control interface with touch-screen
- Operating pressure: to 10 bar
- Operating temperature: +5°C to +90°C
- Materials: Gunmetal, Stainless steel, Plastics

Application

- Balancing of potable water hot circulation systems
- Ensure water exchange in potable water hot & cold pipe sections
- For buildings with complex water installations
- Ideal for retro-fit where existing installations experience poor hot water supply to outlets

GF Hycleen AS Relay cable Uni Controller 5m

1149734

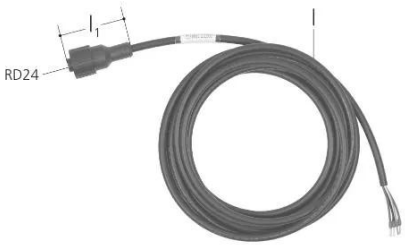

Status

Item Available From date	2026-03-01

Product code

Item no EAN	7613263109064
Item no GF	351110672
Item no GTIN	07613263109064
Item no RSK	4893517

Dimensions

Item Unit Height	29
Item Unit Length	5000
Item Unit Weight	0,4
Item Unit Width	29
Item_UOM	pce

Measurements

LENGTH_L	5
Length (l1)	63

Packaging

Packaging GTIN PL1	06414900171106
Packaging Height PL1	30
Packaging Length PL1	5000
Packaging Quantity PL1	1
Packaging Type PL1	Plastic_Bag
Packaging Volume PL1	0,0045
Packaging Weight PL1	0,41
Packaging Width PL1	30

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+