


GF HT-PP socket plug 50mm

1150206

- Grey, PP-material
- According to BS EN 1451

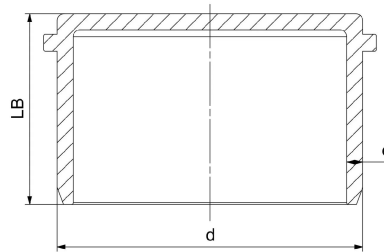

About GF HT-PP socket plug

Specification

- Manufactured using chemical and temperature resistant Polypropylene
- System according to the requirements of BS EN 1451
- Application area B to BS EN 1451
- Fire class E to BS EN 13501-1
- Pipe diameters from 32 mm to 160 mm
- Wide range of fittings to give complete design freedom
- For use with GF standard Clamp fittings

Application

- Office buildings and conference halls
- Schools, libraries, hospitals, hotels, and residential buildings
- Sustainable and green buildings
- Industrial facilities for both short- and long-term applications
- Ideal for pre-fabricated buildings

GF HT-PP socket plug 50mm

1150206



Status

Item Available From date

2026-03-01

Product code

Item no EAN	8698652055367
Item no GF	4901905040721
Item no GTIN	08698652055367
Item no VVS	186523050

Dimensions

Item Unit Height	48
Item Unit Length	60
Item Unit Weight	0,026
Item Unit Width	60
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414900553544
Packaging GTIN PL2	06414900231701
Packaging GTIN PL4	06414900105576
Packaging Height PL1	48
Packaging Height PL2	400
Packaging Height PL4	1200
Packaging Length PL1	60
Packaging Length PL2	800
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL2	1000
Packaging Quantity PL4	6000
Packaging Type PL1	Piece
Packaging Type PL2	Medium_Box

Packaging Type PL4	Pallet
Packaging Volume PL1	0,0001728
Packaging Volume PL2	0,192
Packaging Volume PL4	1,44
Packaging Weight PL1	0,026
Packaging Weight PL2	26
Packaging Weight PL4	181
Packaging Width PL1	60
Packaging Width PL2	600
Packaging Width PL4	1000
Measurements	
Wall thickness_s	16
Z Measurement d	50
Z Measurement d1	57,7
Z Measurement e	1,8
z1	2,5

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavillion
 WD18 8GA, Watford
 UK

T +44 (0)1923 381212
 E
 customerservice.uk.bfs@georgfi
 scher.com