


GF HT-PP socket plug 160mm

1150212

- Grey, PP-material
- According to BS EN 1451

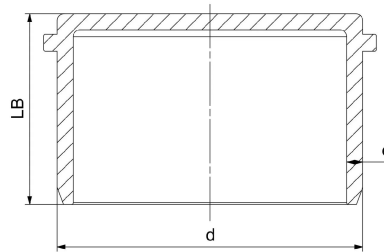

About GF HT-PP socket plug

Specification

- Manufactured using chemical and temperature resistant Polypropylene
- System according to the requirements of BS EN 1451
- Application area B to BS EN 1451
- Fire class E to BS EN 13501-1
- Pipe diameters from 32 mm to 160 mm
- Wide range of fittings to give complete design freedom
- For use with GF standard Clamp fittings

Application

- Office buildings and conference halls
- Schools, libraries, hospitals, hotels, and residential buildings
- Sustainable and green buildings
- Industrial facilities for both short- and long-term applications
- Ideal for pre-fabricated buildings

GF HT-PP socket plug 160mm

1150212



Status

Item Available From date

2026-03-01

Product code

Item no EAN	8698652032122
Item no GF	4901916016121
Item no GTIN	08698652032122
Item no VVS	186523160

Dimensions

Item Unit Height	88
Item Unit Length	173
Item Unit Weight	0,37
Item Unit Width	173
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414900601818
Packaging GTIN PL2	06414900231732
Packaging GTIN PL4	06414900105705
Packaging Height PL1	88
Packaging Height PL2	400
Packaging Height PL4	1200
Packaging Length PL1	173
Packaging Length PL2	800
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL2	60
Packaging Quantity PL4	360
Packaging Type PL1	Piece
Packaging Type PL2	Medium_Box

Packaging Type PL4	Pallet
Packaging Volume PL1	0,002633752
Packaging Volume PL2	0,192
Packaging Volume PL4	1,44
Packaging Weight PL1	0,37
Packaging Weight PL2	22,2
Packaging Weight PL4	158,2
Packaging Width PL1	173
Packaging Width PL2	600
Packaging Width PL4	1000

Measurements

Wall thickness_s	16
Z Measurement d	160
Z Measurement d1	173
Z Measurement e	4,9
z1	5,1

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E
customerservice.uk.bfs@georgfi
scher.com