


## GF iFIT adapter HMS 20x16/20

**1151195**

- Socket fusion transition to iFIT
- Thread in DZR brass, UBA (Umwelt Bundesamt, Germany) conform
- EPDM sealing hot and cold water approved
- Material: brass dezincification resistant, PB
- PN 16 at 20°C

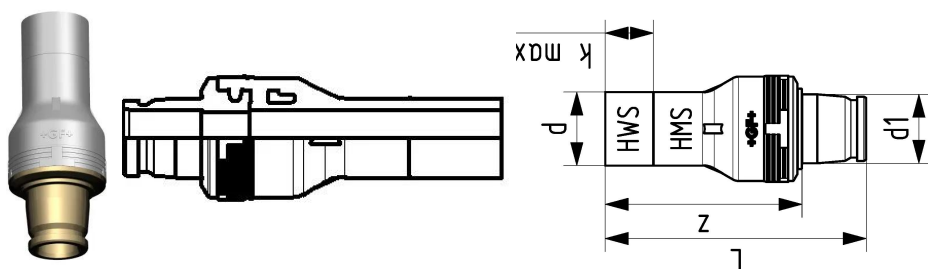

### About GF iFIT adapter HMS

#### Specification

- The iFIT system is subject to constant inspection by internal and external bodies.
- These inspections range from quality assurance during production to ISO certification for environmental and process safety. The iFIT system meets the requirements for the most important applications in the building technology and is subject to constant monitoring by the licensing offices for drinking water and heating installations on land and sea.

#### Application


- Application area Cold and hot water, HVAC, greywater
- 
- Installation Surface and flush-mounted pipes, pipe-in-pipe technology

#### Certification

- SVGW
- DVGW
- ÖVGW

## GF iFIT adapter HMS 20x16/20

1151195

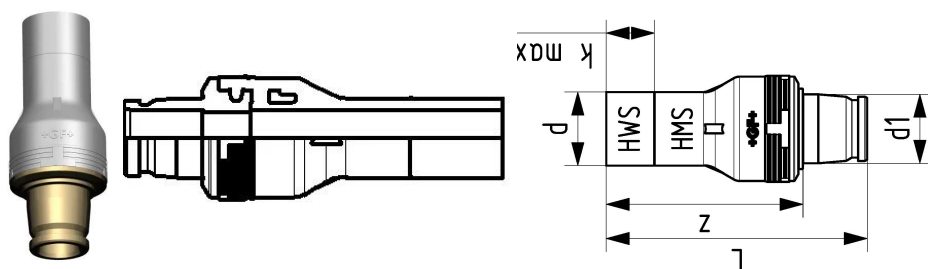

### Measurements

Inner_diameter_di	16 - 20
LENGTH_L	96
Z	76

### Status

Item Available Till date	2026-12-15T00:00:00.000+0100
Until stocks last	Until stocks last

### Product code

Item no EAN	7611205903794
Item no GF	762101254
Item no GTIN	07611205903794
Item no LVI	1749412
Item Replacement 1	1185833

### Dimensions

Item Unit Height	105.2
Item Unit Length	31.2
Item Unit Weight	0,088
Item Unit Width	31.2
Item_UOM	pce

### Packaging

Packaging GTIN PL1	06414900062367
Packaging Height PL1	50
Packaging Length PL1	150
Packaging Quantity PL1	1
Packaging Type PL1	Plastic_Bag
Packaging Volume PL1	0,000375
Packaging Weight PL1	0,09
Packaging Width PL1	50

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)