


GF iFIT adapter HMS 25x25/32

1151197

- Socket fusion transition to iFIT
- Thread in DZR brass, UBA (Umwelt Bundesamt, Germany) conform
- EPDM sealing hot and cold water approved
- Material: brass dezincification resistant, PB
- PN 16 at 20°C

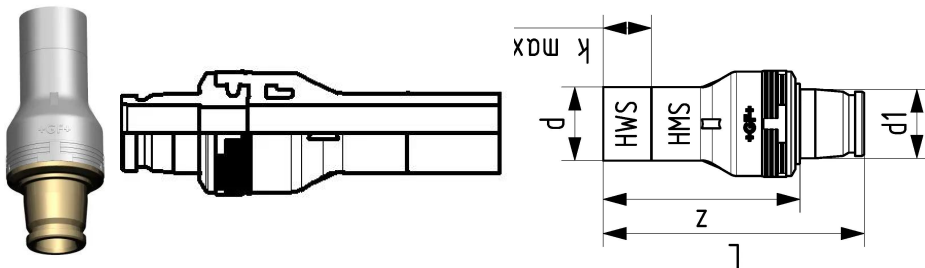

About GF iFIT adapter HMS

Specification

- The iFIT system is subject to constant inspection by internal and external bodies.
- These inspections range from quality assurance during production to ISO certification for environmental and process safety. The iFIT system meets the requirements for the most important applications in the building technology and is subject to constant monitoring
- by the licensing offices for drinking water and heating installations on land and sea.

Application

- Application area Cold and hot water, HVAC, greywater
-
- Installation Surface and flush-mounted pipes, pipe-in-pipe technology

Certification

- SVGW
- DVGW
- ÖVGW

GF iFIT adapter HMS 25x25/32

1151197



Measurements

Inner_diameter_di	25 - 32
LENGTH_L	108
Z	83

Status

Item Available Till date	2026-12-15T00:00:00.000+0100
Until stocks last	Until stocks last

Product code

Item no EAN	7611205903817
Item no GF	762101256
Item no GTIN	07611205903817
Item no LVI	1749414
Item Replacement 1	1185844

Dimensions

Item Unit Height	120.2
Item Unit Length	36.8
Item Unit Weight	0,164
Item Unit Width	36.8
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414900062381
Packaging Height PL1	50
Packaging Length PL1	150
Packaging Quantity PL1	1
Packaging Type PL1	Plastic_Bag
Packaging Volume PL1	0,000375
Packaging Weight PL1	0,18
Packaging Width PL1	50

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb