


## GF iFIT pipe insulated S6 25-2,5 25m 6mm

**1151245**

- Description: in coils
- Material: PE-RT/AL/PE-RT (white)
- Insulation: W/mK 0.035
- PN 16 at 20°C

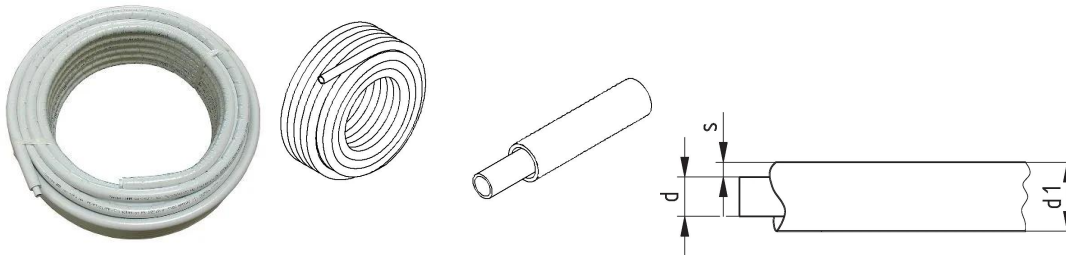

### About GF iFIT pipe insulated S6

#### Specification

- The iFIT system is subject to constant inspection by internal and external bodies.
- These inspections range from quality assurance during production to ISO certification for environmental and process safety. The iFIT system meets the requirements for the most important applications in the building technology and is subject to constant monitoring by the licensing offices for drinking water and heating installations on land and sea.

#### Application

- Application area Cold and hot water, HVAC, greywater
- 
- Installation Surface and flush-mounted pipes, pipe-in-pipe technology

#### Certification

- SVGW
- DVGW
- ÖVGW

## GF iFIT pipe insulated S6 25-2,5 25m 6mm

1151245



### Measurements

Inner_diameter_di	37
Wall thickness_s1	6

### Product code

Item no EAN	7611205905644
Item no GF	762101314
Item no GTIN	07611205905644

### Dimensions

Item Unit Height	43
Item Unit Length	1000
Item Unit Weight	0,15
Item Unit Width	43
Item_UOM	m

### Packaging

Packaging GTIN PL2	07611205912130
Packaging GTIN PL4	07611205908010
Packaging Height PL2	780
Packaging Height PL4	1800
Packaging Length PL2	790
Packaging Length PL4	1200
Packaging Quantity PL2	25
Packaging Quantity PL4	300
Packaging Type PL2	Medium_Box
Packaging Type PL4	Pallet
Packaging Volume PL2	0,117078
Packaging Volume PL4	1,728
Packaging Weight PL2	3,86
Packaging Weight PL4	71,32

Packaging Width PL2	190
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavillion  
WD18 8GA, Watford  
UK

T +44 (0)1923 381212

E  
customerservice.uk.bfs@georgfi  
scher.com