

GF iFIT pipe insulated S6 16-2.0 50m 6mm


1151287

Description: in coils

Material: PE-RT/AL/PE-RT (white)

Insulation: W/mK 0.035

- PN 16 at 20°C

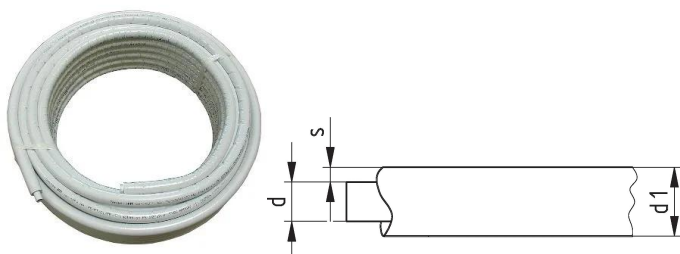

About GF iFIT pipe insulated S6

Specification

- The iFIT system is subject to constant inspection by internal and external bodies.
- These inspections range from quality assurance during production to ISO certification for environmental and process safety. The iFIT system meets the requirements for the most important applications in the building technology and is subject to constant monitoring
- by the licensing offices for drinking water and heating installations on land and sea.

Application


- Application area Cold and hot water, HVAC, greywater
-
- Installation Surface and flush-mounted pipes, pipe-in-pipe technology

Certification

- 5,1

GF iFIT pipe insulated S6 16-2.0 50m 6mm

1151287

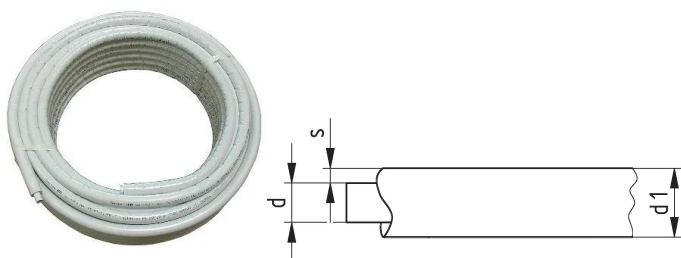

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb