


## GF iFIT pipe insulated S6 16-2.0 50m 6mm

1151287

- Description: in coils
- Material: PE-RT/AL/PE-RT (white)
- Insulation: W/mK 0.035
- PN 16 at 20°C

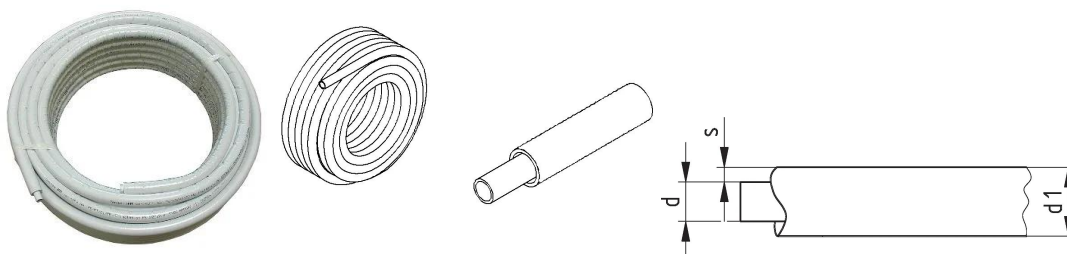

### About GF iFIT pipe insulated S6

#### Specification

- The iFIT system is subject to constant inspection by internal and external bodies.
- These inspections range from quality assurance during production to ISO certification for environmental and process safety. The iFIT system meets the requirements for the most important applications in the building technology and is subject to constant monitoring by the licensing offices for drinking water and heating installations on land and sea.

#### Application

- Application area Cold and hot water, HVAC, greywater
- 
- Installation Surface and flush-mounted pipes, pipe-in-pipe technology

#### Certification

- SVGW
- DVGW
- ÖVGW

## GF iFIT pipe insulated S6 16-2.0 50m 6mm

1151287



### Product code

Item no EAN	7611205912383
Item no GF	762101365
Item no GTIN	07611205912383

### Dimensions

Item Unit Height	34
Item Unit Length	1000
Item Unit Weight	0,15
Item Unit Width	34
Item_UOM	m

### Packaging

Packaging GTIN PL1	06414900253116
Packaging GTIN PL4	07611205912697
Packaging Height PL1	790
Packaging Height PL4	1800
Packaging Length PL1	790
Packaging Length PL4	1200
Packaging Quantity PL1	50
Packaging Quantity PL4	700
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,093615
Packaging Volume PL4	1,728
Packaging Weight PL1	7,6
Packaging Weight PL4	127
Packaging Width PL1	150
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)