


GF iFIT pipe insulated S6 20-2.0 50m 6mm

1151288

- Description: in coils
- Material: PE-RT/AL/PE-RT (white)
- Insulation: W/mK 0.035
- PN 16 at 20°C

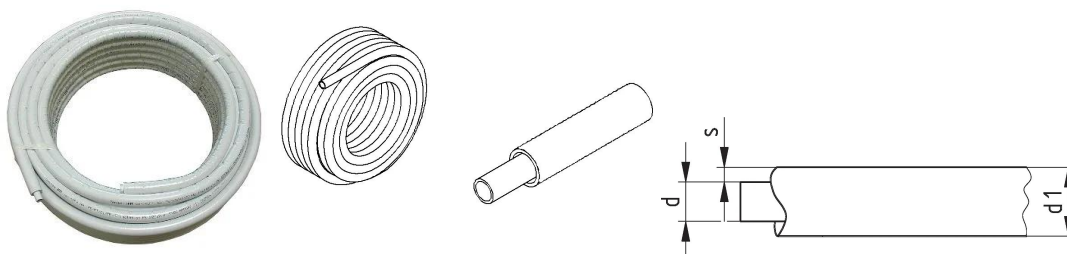

About GF iFIT pipe insulated S6

Specification

- The iFIT system is subject to constant inspection by internal and external bodies.
- These inspections range from quality assurance during production to ISO certification for environmental and process safety. The iFIT system meets the requirements for the most important applications in the building technology and is subject to constant monitoring by the licensing offices for drinking water and heating installations on land and sea.

Application


- Application area Cold and hot water, HVAC, greywater
-
- Installation Surface and flush-mounted pipes, pipe-in-pipe technology

Certification

- SVGW
- DVGW
- ÖVGW

GF iFIT pipe insulated S6 20-2.0 50m 6mm

1151288

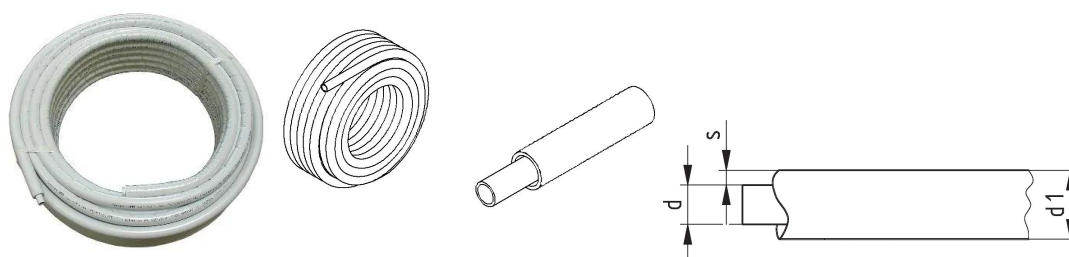

Measurements

Inner_diameter_di	32
Wall thickness_s1	6

Product code

Item no EAN	7611205911492
Item no GF	762101366
Item no GTIN	07611205911492

Dimensions

Item Unit Height	38
Item Unit Length	1000
Item Unit Weight	0,188
Item Unit Width	38
Item_UOM	m

Packaging

Packaging GTIN PL1	06414900225991
Packaging GTIN PL2	07611205912178
Packaging GTIN PL4	07611205911515
Packaging Height PL1	200
Packaging Height PL2	780
Packaging Height PL4	1800
Packaging Length PL1	680
Packaging Length PL2	790
Packaging Length PL4	1200
Packaging Quantity PL1	50
Packaging Quantity PL2	50
Packaging Quantity PL4	600
Packaging Type PL1	Piece
Packaging Type PL2	Medium_Box

Packaging Type PL4	Pallet
Packaging Volume PL1	0,09248
Packaging Volume PL2	0,117078
Packaging Volume PL4	1,728
Packaging Weight PL1	9,4
Packaging Weight PL2	10,5
Packaging Weight PL4	151
Packaging Width PL1	680
Packaging Width PL2	190
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb