


GF iFIT compression adapter LF 16/20-18

1151305

- Temperature: max. 90°C
- Material: gunmetal lead-free
- PN 16 at 20°C

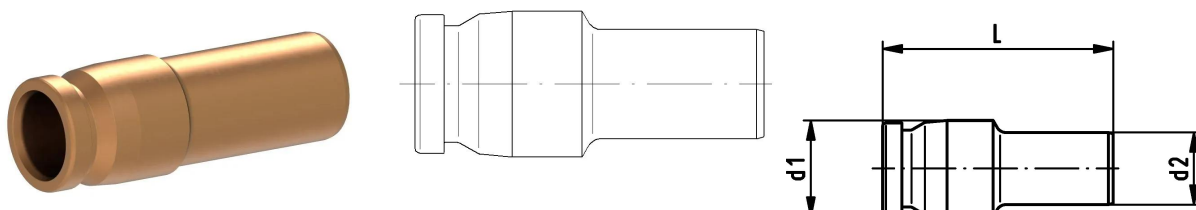

About GF iFIT compression adapter LF

Specification

- The iFIT system is subject to constant inspection by internal and external bodies.
- These inspections range from quality assurance during production to ISO certification for environmental and process safety. The iFIT system meets the requirements for the most important applications in the building technology and is subject to constant monitoring by the licensing offices for drinking water and heating installations on land and sea.

Application


- Application area Cold and hot water, HVAC, greywater
-
- Installation Surface and flush-mounted pipes, pipe-in-pipe technology

Certification

- SVGW
- DVGW
- ÖVGW

GF iFIT compression adapter LF 16/20-18

1151305

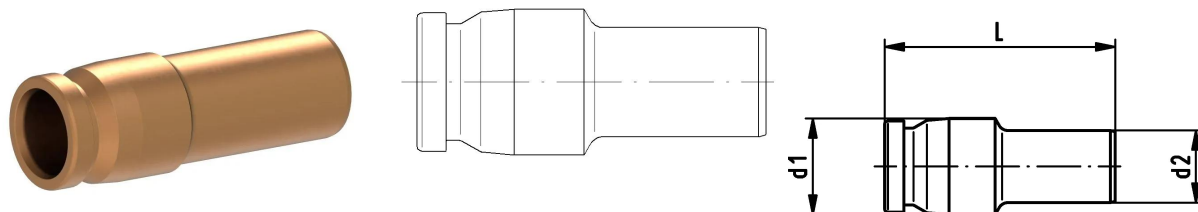

Measurements

Inner_diameter_di	16 - 20
LENGTH_L	56
Z Measurement d2	18

Product code

Item no EAN	7613263115607
Item no GF	762102191
Item no GTIN	07613263115607

Dimensions

Item Unit Height	18
Item Unit Length	55
Item Unit Weight	0,037
Item Unit Width	18
Item_UOM	pce

Packaging

Packaging GTIN PL1	07613263115614
Packaging GTIN PL2	07613263115621
Packaging Height PL1	23
Packaging Height PL2	120
Packaging Length PL1	78
Packaging Length PL2	180
Packaging Quantity PL1	2
Packaging Quantity PL2	20
Packaging Type PL1	Plastic_Bag
Packaging Type PL2	Medium_Box
Packaging Volume PL1	0,000129168
Packaging Volume PL2	0,002808
Packaging Weight PL1	0,076

Packaging Weight PL2	1,27
Packaging Width PL1	72
Packaging Width PL2	130

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb