


## GF iFIT compression adapter LF 16/20-18

1151305

- Temperature: max. 90°C
- Material: gunmetal lead-free
- PN 16 at 20°C

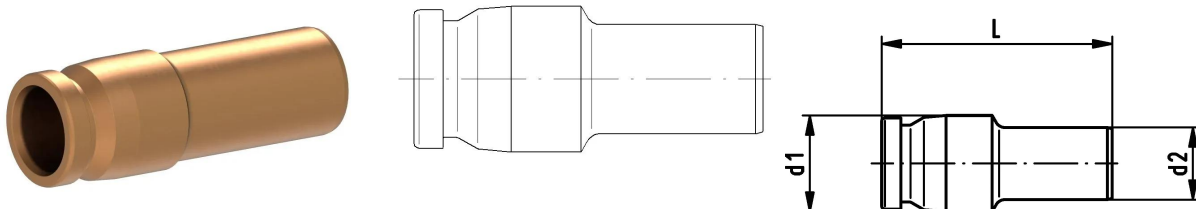

### About GF iFIT compression adapter LF

#### Specification

- The iFIT system is subject to constant inspection by internal and external bodies.
- These inspections range from quality assurance during production to ISO certification for environmental and process safety. The iFIT system meets the requirements for the most important applications in the building technology and is subject to constant monitoring by the licensing offices for drinking water and heating installations on land and sea.

#### Application


- Application area Cold and hot water, HVAC, greywater
- 
- Installation Surface and flush-mounted pipes, pipe-in-pipe technology

#### Certification

- SVGW
- DVGW
- ÖVGW

## GF iFIT compression adapter LF 16/20-18

1151305

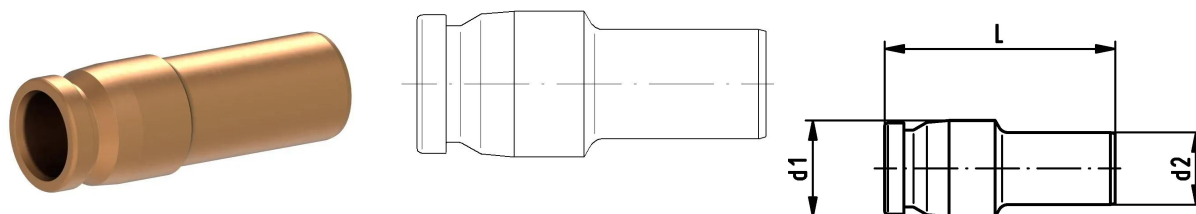

### Measurements

Inner_diameter_di	16 - 20
LENGTH_L	56
Z Measurement d1	16 - 20
Z Measurement d2	18

### Product code

Item no EAN	7613263115607
Item no GF	762102191
Item no GTIN	07613263115607

### Dimensions

Item Unit Height	18
Item Unit Length	55
Item Unit Weight	0,037
Item Unit Width	18
Item_UOM	pce

### Packaging

Packaging GTIN PL1	07613263115614
Packaging GTIN PL2	07613263115621
Packaging Height PL1	23
Packaging Height PL2	120
Packaging Length PL1	78
Packaging Length PL2	180
Packaging Quantity PL1	2
Packaging Quantity PL2	20
Packaging Type PL1	Plastic_Bag
Packaging Type PL2	Medium_Box
Packaging Volume PL1	0,000129168
Packaging Volume PL2	0,002808

Packaging Weight PL1	0,076
Packaging Weight PL2	1,27
Packaging Width PL1	72
Packaging Width PL2	130

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavillion  
WD18 8GA, Watford  
UK

T +44 (0)1923 381212

E  
customerservice.uk.bfs@georgfi  
scher.com