


GF iFIT male thread adapter LF 16/20-1/2"

1151311

- Material: gunmetal lead-free
- Connection: male thread
- PN 16 at 20°C

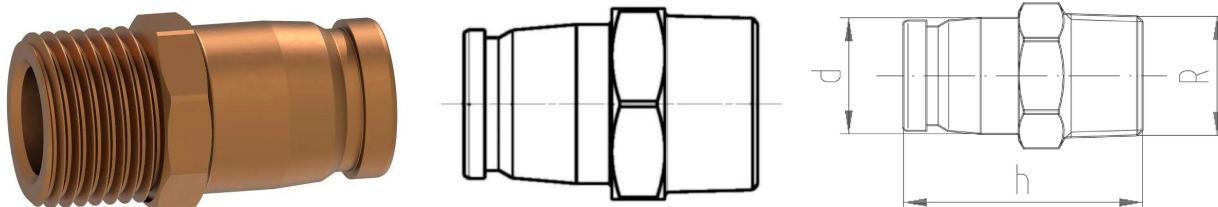

About GF iFIT male thread adapter LF

Specification

- The iFIT system is subject to constant inspection by internal and external bodies.
- These inspections range from quality assurance during production to ISO certification for environmental and process safety. The iFIT system meets the requirements for the most important applications in the building technology and is subject to constant monitoring by the licensing offices for drinking water and heating installations on land and sea.

Application


- Application area Cold and hot water, HVAC, greywater
-
- Installation Surface and flush-mounted pipes, pipe-in-pipe technology

Certification

- SVGW
- DVGW
- ÖVGW

GF iFIT male thread adapter LF 16/20-1/2"

1151311

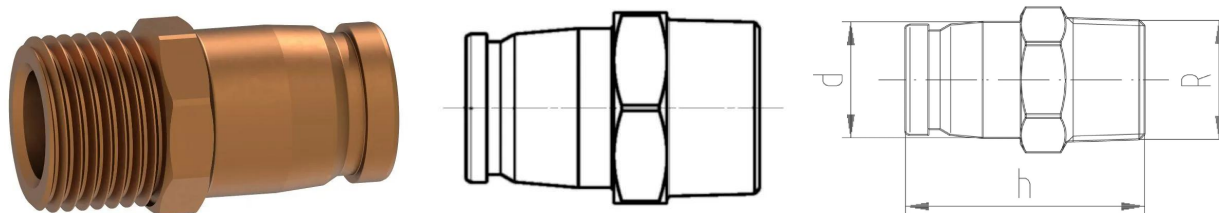

Product code

Item no EAN	7611205912390
Item no GF	762102265
Item no GTIN	07611205912390
Item no LVI	1749417

Dimensions

Item Unit Height	25
Item Unit Length	41.6
Item Unit Weight	0,065
Item Unit Width	25
Item_UOM	pce

Packaging

Packaging GTIN PL1	07611205912406
Packaging GTIN PL2	07611205912413
Packaging GTIN PL4	06414900118453
Packaging Height PL1	48
Packaging Height PL2	145
Packaging Height PL4	750
Packaging Length PL1	131
Packaging Length PL2	265
Packaging Length PL4	1200
Packaging Quantity PL1	10
Packaging Quantity PL2	50
Packaging Quantity PL4	5760
Packaging Type PL1	Plastic_Bag
Packaging Type PL2	Medium_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,000584784

Packaging Volume PL2	0,005955875
Packaging Volume PL4	0,72
Packaging Weight PL1	0,66
Packaging Weight PL2	3,422
Packaging Weight PL4	419,2
Packaging Width PL1	93
Packaging Width PL2	155
Packaging Width PL4	800
Measurements	
Z Measurement h	43

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb