


GF iFIT male thread adapter LF 16/20-3/4"

1151312

- Material: gunmetal lead-free
- Connection: male thread
- PN 16 at 20°C

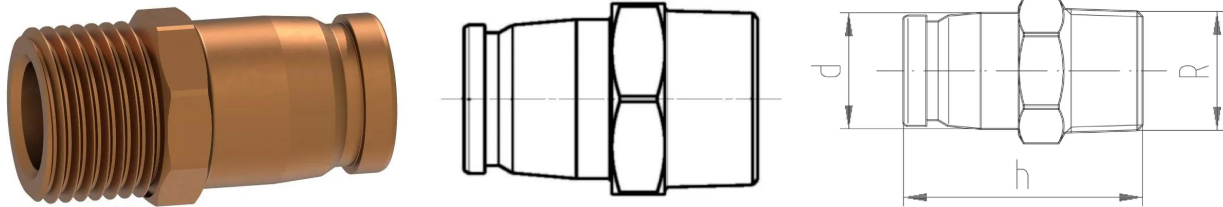

About GF iFIT male thread adapter LF

Specification

- The iFIT system is subject to constant inspection by internal and external bodies.
- These inspections range from quality assurance during production to ISO certification for environmental and process safety. The iFIT system meets the requirements for the most important applications in the building technology and is subject to constant monitoring by the licensing offices for drinking water and heating installations on land and sea.

Application


- Application area Cold and hot water, HVAC, greywater
-
- Installation Surface and flush-mounted pipes, pipe-in-pipe technology

Certification

- SVGW
- DVGW
- ÖVGW

GF iFIT male thread adapter LF 16/20-3/4"

1151312

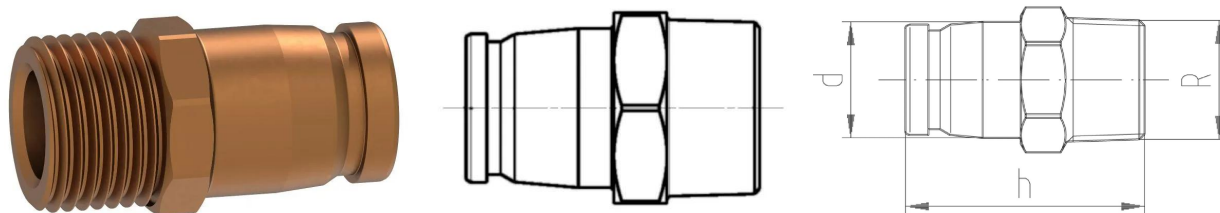

Product code

Item no EAN	7611205912420
Item no GF	762102266
Item no GTIN	07611205912420
Item no LVI	1749423

Dimensions

Item Unit Height	30
Item Unit Length	42
Item Unit Weight	0,071
Item Unit Width	30
Item_UOM	pce

Packaging

Packaging GTIN PL1	07611205912437
Packaging GTIN PL2	07611205912444
Packaging GTIN PL4	06414900118446
Packaging Height PL1	49
Packaging Height PL2	133
Packaging Height PL4	800
Packaging Length PL1	162
Packaging Length PL2	237
Packaging Length PL4	1200
Packaging Quantity PL1	10
Packaging Quantity PL2	50
Packaging Quantity PL4	4320
Packaging Type PL1	Plastic_Bag
Packaging Type PL2	Medium_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00099225

Packaging Volume PL2	0,005547696
Packaging Volume PL4	0,768
Packaging Weight PL1	0,715
Packaging Weight PL2	3,69
Packaging Weight PL4	343,86
Packaging Width PL1	125
Packaging Width PL2	176
Packaging Width PL4	800
Measurements	
Z Measurement h	43

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb