


GF iFIT male thread adapter LF 25/32-3/4"

1151315

- Material: gunmetal lead-free
- Connection: male thread
- PN 16 at 20°C

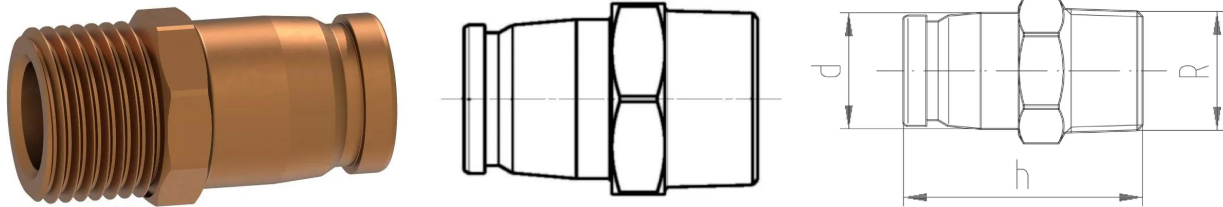

About GF iFIT male thread adapter LF

Specification

- The iFIT system is subject to constant inspection by internal and external bodies.
- These inspections range from quality assurance during production to ISO certification for environmental and process safety. The iFIT system meets the requirements for the most important applications in the building technology and is subject to constant monitoring by the licensing offices for drinking water and heating installations on land and sea.

Application


- Application area Cold and hot water, HVAC, greywater
-
- Installation Surface and flush-mounted pipes, pipe-in-pipe technology

Certification

- SVGW
- DVGW
- ÖVGW

GF iFIT male thread adapter LF 25/32-3/4"

1151315

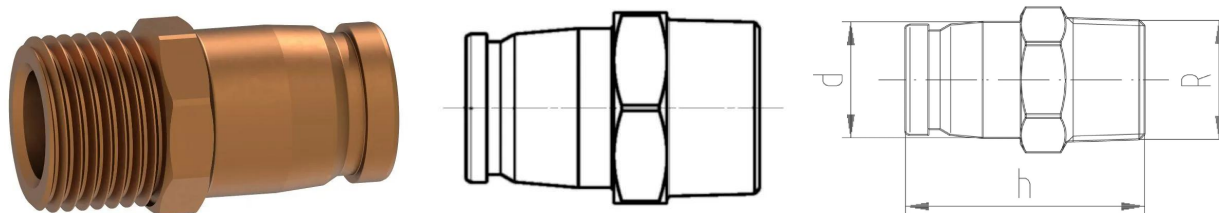

Product code

Item no EAN	7611205912543
Item no GF	762102277
Item no GTIN	07611205912543
Item no LVI	1749421

Dimensions

Item Unit Height	36
Item Unit Length	50.5
Item Unit Weight	0,155
Item Unit Width	36
Item_UOM	pce

Packaging

Packaging GTIN PL1	07611205912550
Packaging GTIN PL2	07611205912567
Packaging GTIN PL4	06414900118415
Packaging Height PL1	40
Packaging Height PL2	150
Packaging Height PL4	1000
Packaging Length PL1	95
Packaging Length PL2	260
Packaging Length PL4	1200
Packaging Quantity PL1	2
Packaging Quantity PL2	20
Packaging Quantity PL4	1600
Packaging Type PL1	Plastic_Bag
Packaging Type PL2	Medium_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,000323

Packaging Volume PL2	0,006045
Packaging Volume PL4	0,96
Packaging Weight PL1	0,32
Packaging Weight PL2	3,323
Packaging Weight PL4	290,8
Packaging Width PL1	85
Packaging Width PL2	155
Packaging Width PL4	800
Measurements	
Z Measurement h	53

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb