


GF Instaflex ball valve 546 pro PP max. 70° DN20

1151589

- Compressed air 10 bar
- Working temperature max. +70°C
- * on request

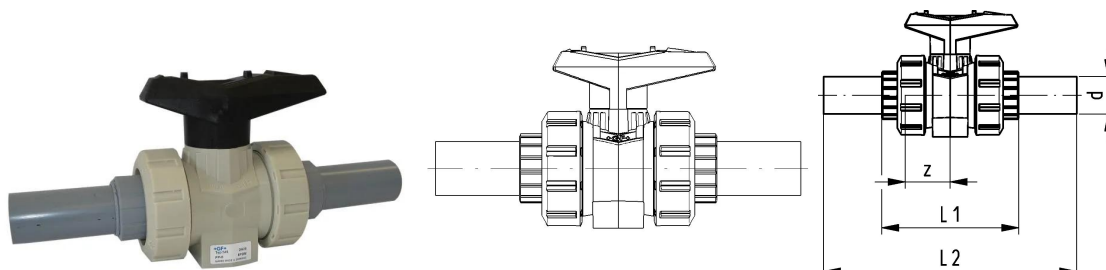

About GF Instaflex ball valve 546 pro PP max. 70°

Specification

- The system is subject to constant inspection by internal and external bodies.
- These inspections range from quality assurance during production to ISO certification
- for environmental and process safety. The INSTAFLEX system meets all the essential
- requirements for building technology applications and is subject to constant monitoring by the
- licensing offices for drinking water, heating and compressed air installations on land and sea.

Application

Instaflex offers complete solutions for single-family homes, multi-family residential buildings, healthcare, education, industrial, or commercial building

Application areas

- hot & cold water, compressed air, cooling systems
- Surface and flush-mounted pipelines

Certification

- WRAS material approval (BS6920)

GF Instaflex ball valve 546 pro PP max. 70° DN20

1151589



Product code

Item no EAN	7611205887872
Item no GF	760000344
Item no GTIN	07611205887872
Item no LVI	2075343

Dimensions

Item Unit Height	148
Item Unit Length	190
Item Unit Weight	0,203
Item Unit Width	59
Item_UOM	pce

Measurements

Length (l2)	208
Z Measurement d	25
Z Measurement L1	108
Z	38

Packaging

Packaging GTIN PL1	06414900063012
Packaging Height PL1	107
Packaging Length PL1	201
Packaging Quantity PL1	1
Packaging Type PL1	Base_Box
Packaging Volume PL1	0,003290571
Packaging Weight PL1	0,276
Packaging Width PL1	153

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212

E
customerservice.uk.bfs@georgfi
scher.com