


## GF Instaflex ball valve 546 pro PP max. 70deg DN32

**1151591**

- Compressed air 10 bar
- Working temperture max. +70°C
- \* on request

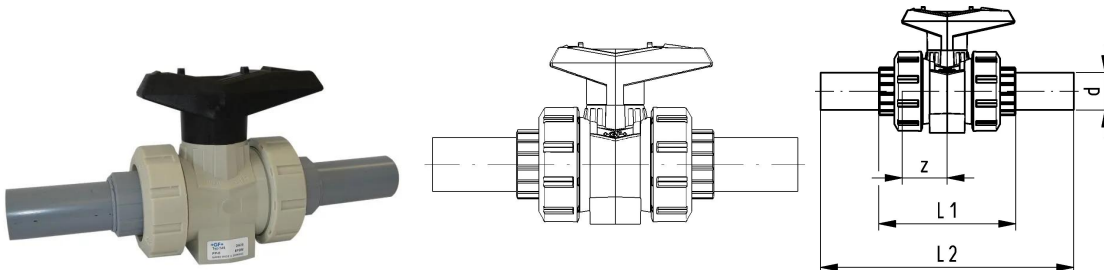

### About GF Instaflex ball valve 546 pro PP max. 70deg

#### Specification

- The system is subject to constant inspection by internal and external bodies.
- These inspections range from quality assurance during production to ISO certification
- for environmental and process safety. The INSTAFLEX system meets all the essential
- requirements for building technology applications and is subject to constant monitoring by the
- licensing offices for drinking water, heating and compressed air installations on land and sea.

#### Application

Instaflex offers complete solutions for single-family homes, multi-family residential buildings, healthcare, education, industrial, or commercial building

##### Application areas


- hot & cold water, compressed air, cooling systems
- Surface and flush-mounted pipelines

#### Certification

- WRAS material approval (BS6920)

## GF Instaflex ball valve 546 pro PP max. 70deg DN32

1151591

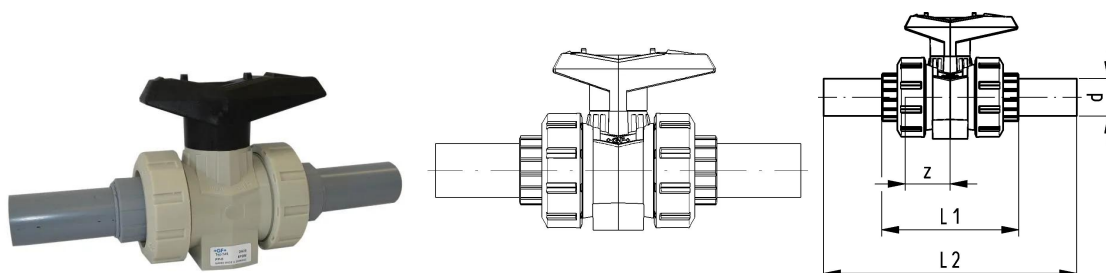

### Product code

Item no EAN	7611205887896
Item no GF	760000346
Item no GTIN	07611205887896
Item no LVI	2022377

### Dimensions

Item Unit Height	138
Item Unit Length	253
Item Unit Weight	0,512
Item Unit Width	84
Item_UOM	pce

### Measurements

Length (l2)	250
Z	47

### Packaging

Packaging GTIN PL1	06414900454568
Packaging Height PL1	158
Packaging Length PL1	277
Packaging Quantity PL1	1
Packaging Type PL1	Plastic_Bag
Packaging Volume PL1	0,009147094
Packaging Weight PL1	0,614
Packaging Width PL1	209

### Technical documents

Download documents here

[enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)