


GF Instaflex ball valve 546 pro PP max. 70° DN32

1151591

- Compressed air 10 bar
- Working temperature max. +70°C
- * on request

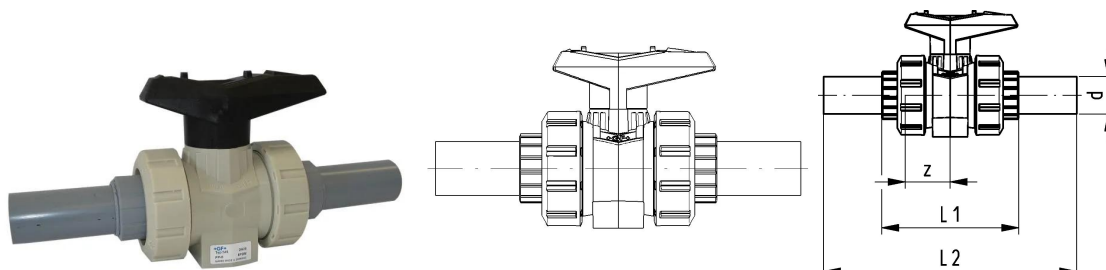

About GF Instaflex ball valve 546 pro PP max. 70°

Specification

- The system is subject to constant inspection by internal and external bodies.
- These inspections range from quality assurance during production to ISO certification
- for environmental and process safety. The INSTAFLEX system meets all the essential
- requirements for building technology applications and is subject to constant monitoring by the
- licensing offices for drinking water, heating and compressed air installations on land and sea.

Application

Instaflex offers complete solutions for single-family homes, multi-family residential buildings, healthcare, education, industrial, or commercial building

Application areas

- hot & cold water, compressed air, cooling systems
- Surface and flush-mounted pipelines

Certification

- WRAS material approval (BS6920)

GF Instaflex ball valve 546 pro PP max. 70° DN32

1151591



Product code

Item no EAN	7611205887896
Item no GF	760000346
Item no GTIN	07611205887896
Item no LVI	2022377

Dimensions

Item Unit Height	138
Item Unit Length	253
Item Unit Weight	0,512
Item Unit Width	84
Item_UOM	pce

Measurements

Length (l2)	250
Z Measurement d	40
Z Measurement L1	137
Z	47

Packaging

Packaging GTIN PL1	06414900454568
Packaging Height PL1	158
Packaging Length PL1	277
Packaging Quantity PL1	1
Packaging Type PL1	Plastic_Bag
Packaging Volume PL1	0,009147094
Packaging Weight PL1	0,52
Packaging Width PL1	209

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212

E
customerservice.uk.bfs@georgfi
scher.com