


## GF Instaflex ball valve 546 pro PP max. 70° DN40

**1151592**

- Compressed air 10 bar
- Working temperature max. +70°C
- \* on request

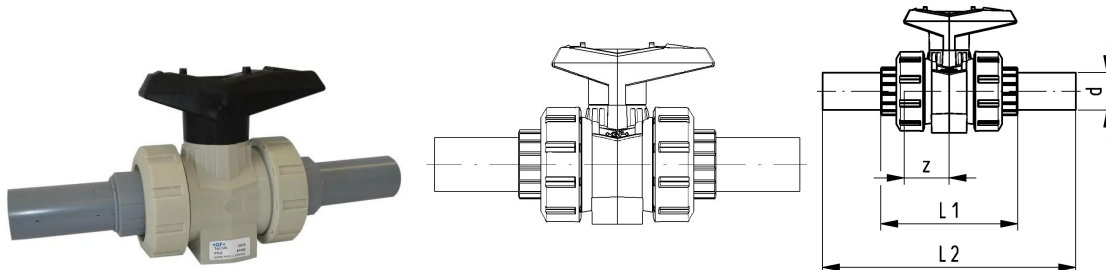

### About GF Instaflex ball valve 546 pro PP max. 70°

#### Specification

- The system is subject to constant inspection by internal and external bodies.
- These inspections range from quality assurance during production to ISO certification
- for environmental and process safety. The INSTAFLEX system meets all the essential
- requirements for building technology applications and is subject to constant monitoring by the
- licensing offices for drinking water, heating and compressed air installations on land and sea.

#### Application

Instaflex offers complete solutions for single-family homes, multi-family residential buildings, healthcare, education, industrial, or commercial building

##### Application areas


- hot & cold water, compressed air, cooling systems
- Surface and flush-mounted pipelines

#### Certification

- WRAS material approval (BS6920)

## GF Instaflex ball valve 546 pro PP max. 70° DN40

1151592

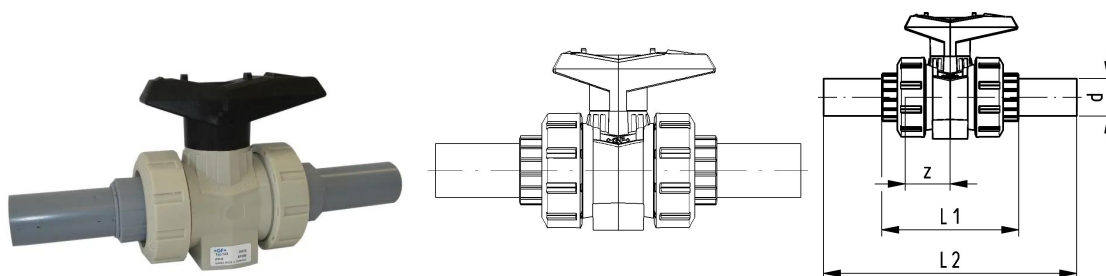

### Product code

Item no EAN	7611205887902
Item no GF	760000347
Item no GTIN	07611205887902
Item no LVI	2075345

### Dimensions

Item Unit Height	153
Item Unit Length	270
Item Unit Weight	0,715
Item Unit Width	97
Item_UOM	pce

### Measurements

Length (l2)	263
Z Measurement d	50
Z Measurement L1	147
Z	49

### Packaging

Packaging GTIN PL1	06414900063029
Packaging Height PL1	158
Packaging Length PL1	277
Packaging Quantity PL1	1
Packaging Type PL1	Base_Box
Packaging Volume PL1	0,009147094
Packaging Weight PL1	0,828
Packaging Width PL1	209

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavillion  
WD18 8GA, Watford  
UK

T +44 (0)1923 381212

E  
customerservice.uk.bfs@georgfi  
scher.com