


GF Instaflex pipe PB d20 / 60m

1151644

- *as long as stock las

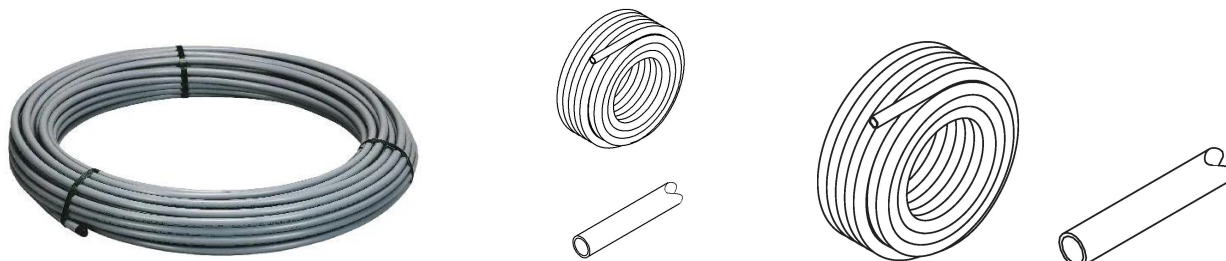

About GF Instaflex pipe PB

Specification

- The system is subject to constant inspection by internal and external bodies.
- These inspections range from quality assurance during production to ISO certification
- for environmental and process safety. The INSTAFLEX system meets all the essential
- requirements for building technology applications and is subject to constant monitoring by the
- licensing offices for drinking water, heating and compressed air installations on land and sea.

Application

Instaflex offers complete solutions for single-family homes, multi-family residential buildings, healthcare, education, industrial, or commercial building

Application areas


- hot & cold water, compressed air, cooling systems
- Surface and flush-mounted pipelines

Certification

- WRAS material approval (BS6920)

GF Instaflex pipe PB d20 / 60m

1151644

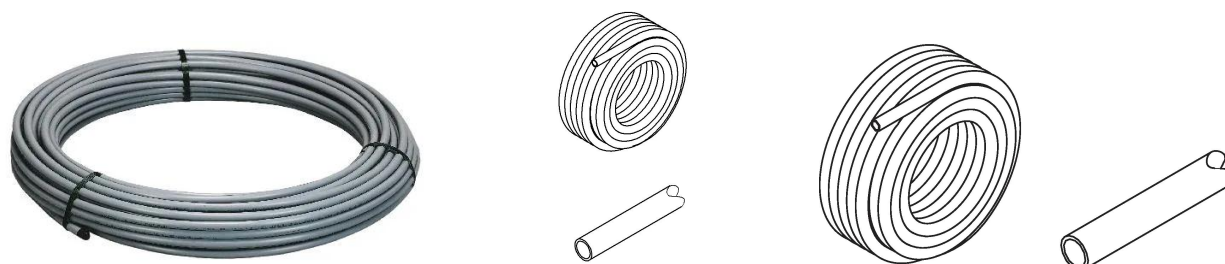

Product code

Item no EAN	7611205821715
Item no GF	760853390
Item no GTIN	07611205821715
Item no LVI	2075347
Item no RSK	1874521

Dimensions

Item Unit Height	20
Item Unit Length	1000
Item Unit Weight	0,15
Item Unit Width	20
Item_UOM	m

Packaging

Packaging GTIN PL1	06414900132824
Packaging GTIN PL4	06414900132831
Packaging Height PL1	810
Packaging Height PL4	1750
Packaging Length PL1	810
Packaging Length PL4	1200
Packaging Quantity PL1	60
Packaging Quantity PL4	900
Packaging Type PL1	Piece
Packaging Type PL4	Pallet
Packaging Volume PL1	0,170586
Packaging Volume PL4	1,68
Packaging Weight PL1	10,2
Packaging Weight PL4	175,5
Packaging Width PL1	260

Packaging Width PL4

800

Measurements

Wall thickness_s

2,8

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb