


GF Instaflex pipe PB bars d125

1151954

- Packed in cardboard boxes
- Material: PB, single layer pipe
- Operation pressure: 16 bars

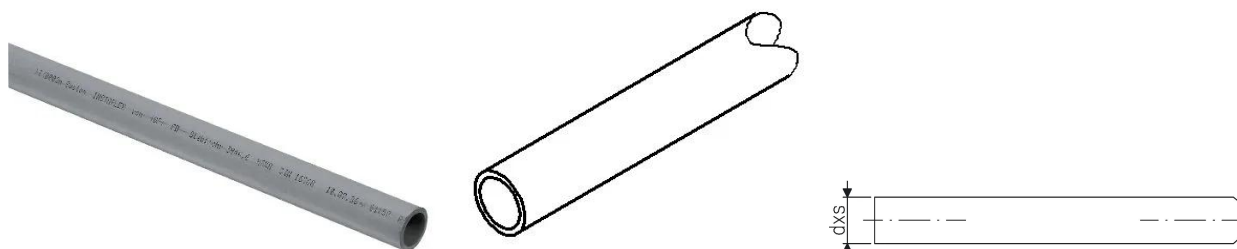

About GF Instaflex pipe PB bars

Specification

- The system is subject to constant inspection by internal and external bodies.
- These inspections range from quality assurance during production to ISO certification for environmental and process safety. The INSTAFLEX system meets all the essential requirements for building technology applications and is subject to constant monitoring by the licensing offices for drinking water, heating and compressed air installations on land and sea.

Application

Instaflex offers complete solutions for single-family homes, multi-family residential buildings, healthcare, education, industrial, or commercial building

Application areas

- hot & cold water, compressed air, cooling systems
- Surface and flush-mounted pipelines

Certification

- WRAS material approval (BS6920)

GF Instaflex pipe PB bars d125

1151954



Product code

Item no EAN	7611205909246
Item no GF	761065326
Item no GTIN	07611205909246
Item no LVI	2075273

Dimensions

Item Unit Height	125
Item Unit Length	1000
Item Unit Weight	3,95
Item Unit Width	125
Item_UOM	m

Packaging

Packaging GTIN PL2	06414900195843
Packaging GTIN PL4	06414900209007
Packaging Height PL2	130
Packaging Height PL4	418
Packaging Length PL2	5800
Packaging Length PL4	5936
Packaging Quantity PL2	5.8
Packaging Quantity PL4	75.4
Packaging Type PL2	Bag
Packaging Type PL4	Wooden_Cage
Packaging Volume PL2	0,09802
Packaging Volume PL4	2,672304096
Packaging Weight PL2	26,41
Packaging Weight PL4	349,28
Packaging Width PL2	130
Packaging Width PL4	1077

Measurements

Wall thickness_s

11,4

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb