


GF Instaflex cap d50

1152110

- Made of Polybuten

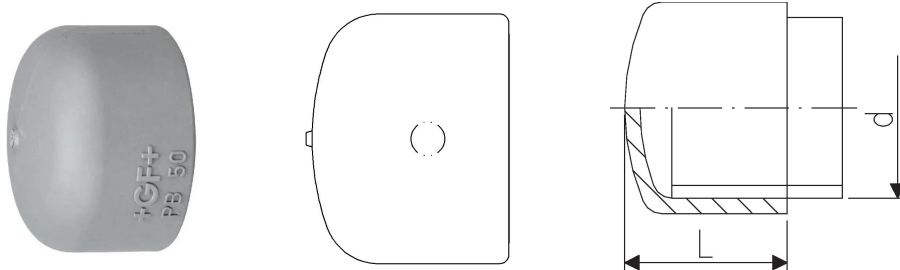

About GF Instaflex cap

Specification

- The system is subject to constant inspection by internal and external bodies.
- These inspections range from quality assurance during production to ISO certification
- for environmental and process safety. The INSTAFLEX system meets all the essential
- requirements for building technology applications and is subject to constant monitoring by the
- licensing offices for drinking water, heating and compressed air installations on land and sea.

Application

Instaflex offers complete solutions for single-family homes, multi-family residential buildings, healthcare, education, industrial, or commercial building

Application areas

- hot & cold water, compressed air, cooling systems
- Surface and flush-mounted pipelines

Certification

- WRAS material approval (BS6920)

GF Instaflex cap d50

1152110



Product code

Item no EAN	7611205835248
Item no GF	761066655
Item no GTIN	07611205835248
Item no RSK	1874852

Dimensions

Item Unit Height	70
Item Unit Length	50
Item Unit Weight	0,05
Item Unit Width	70
Item_UOM	pce

Measurements

LENGTH_L	44
----------	----

Packaging

Packaging GTIN PL1	06414900132282
Packaging GTIN PL4	06414900132299
Packaging Height PL1	72
Packaging Height PL4	950
Packaging Length PL1	60
Packaging Length PL4	1200
Packaging Quantity PL1	10
Packaging Quantity PL4	2700
Packaging Type PL1	Plastic_Bag
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001512
Packaging Volume PL4	0,912
Packaging Weight PL1	0,51
Packaging Weight PL4	170

Packaging Width PL1	350
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb