


GF Instaflex retrofit top d32

1152182

- Suitable to repair the old version of the INSTAFLEX system valve and the new BTV 2.
- For additional information see the installation manual for BTV 2 (760 809 086)
- Gasket: EPDM, quality for potable water
- Material: PB, Brass
- Operation pressure: 16 bars

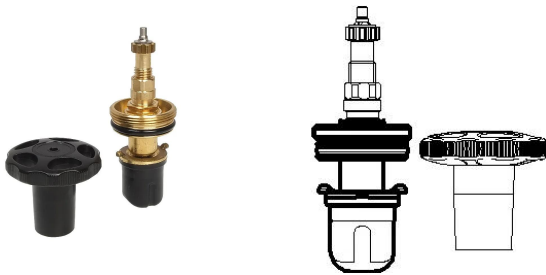

About GF Instaflex retrofit top

Specification

- The system is subject to constant inspection by internal and external bodies.
- These inspections range from quality assurance during production to ISO certification
- for environmental and process safety. The INSTAFLEX system meets all the essential
- requirements for building technology applications and is subject to constant monitoring by the
- licensing offices for drinking water, heating and compressed air installations on land and sea.

Application

Instaflex offers complete solutions for single-family homes, multi-family residential buildings, healthcare, education, industrial, or commercial building

Application areas


- hot & cold water, compressed air, cooling systems
- Surface and flush-mounted pipelines

Certification

- WRAS material approval (BS6920)

GF Instaflex retrofit top d32

1152182

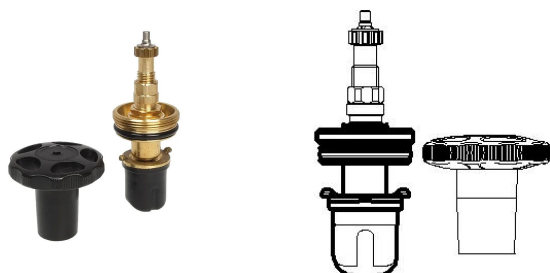

Status

Item Available From date 2025-08-26

Product code

Item no EAN 7611205901325

Item no GF 761066897

Item no GTIN 07611205901325

Dimensions

Item Unit Height 109

Item Unit Length 40

Item Unit Weight 0,227

Item Unit Width 40

Item_UOM pce

Packaging

Packaging GTIN PL1 06414900065221

Packaging Height PL1 50

Packaging Length PL1 120

Packaging Quantity PL1 1

Packaging Type PL1 Base_Box

Packaging Volume PL1 0,0003

Packaging Weight PL1 0,527

Packaging Width PL1 50

Measurements

Z Measurement d 32

Technical documents

Download documents here

customerservice.uk.bfs@georgfischer.com