


GF Instaflex retrofit top d32

1152182

- Suitable to repair the old version of the INSTAFLEX system valve and the new BTV 2.
- For additional information see the installation manual for BTV 2 (760 809 086)
- Gasket: EPDM, quality for potable water
- Material: PB, Brass
- Operation pressure: 16 bars

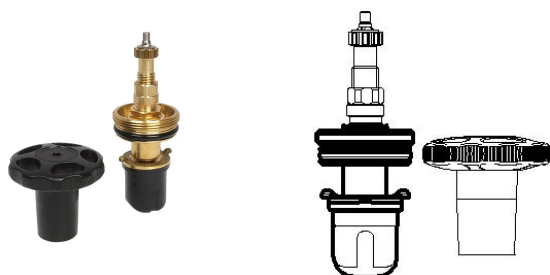

About GF Instaflex retrofit top

Specification

- The system is subject to constant inspection by internal and external bodies.
- These inspections range from quality assurance during production to ISO certification
- for environmental and process safety. The INSTAFLEX system meets all the essential
- requirements for building technology applications and is subject to constant monitoring by the
- licensing offices for drinking water, heating and compressed air installations on land and sea.

Application

Instaflex offers complete solutions for single-family homes, multi-family residential buildings, healthcare, education, industrial, or commercial building

Application areas


- hot & cold water, compressed air, cooling systems
- Surface and flush-mounted pipelines

Certification

- WRAS material approval (BS6920)

GF Instaflex retrofit top d32

1152182

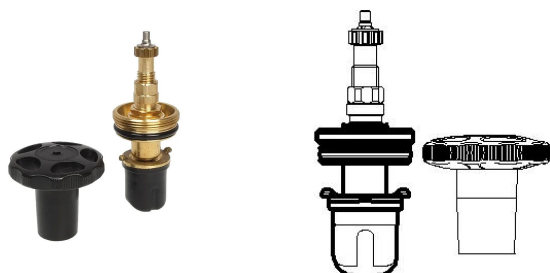

Status

Item Available From date

2025-08-26

Product code

Item no EAN

7611205901325

Item no GF

761066897

Item no GTIN

07611205901325

Dimensions

Item Unit Height

109

Item Unit Length

40

Item Unit Weight

0,227

Item Unit Width

40

Item_UOM

pce

Packaging

Packaging GTIN PL1

06414900065221

Packaging Height PL1

50

Packaging Length PL1

120

Packaging Quantity PL1

1

Packaging Type PL1

Base_Box

Packaging Volume PL1

0,0003

Packaging Weight PL1

0,527

Packaging Width PL1

50

Technical documents

Download documents here

UK

T +44 (0)1923 927000

E enquiries.uk@uponor.com

www.uponor.com/en-gb