


## GF Instaflex tee reduced 90° 40-25 40

1152209

- Made of Polybuten

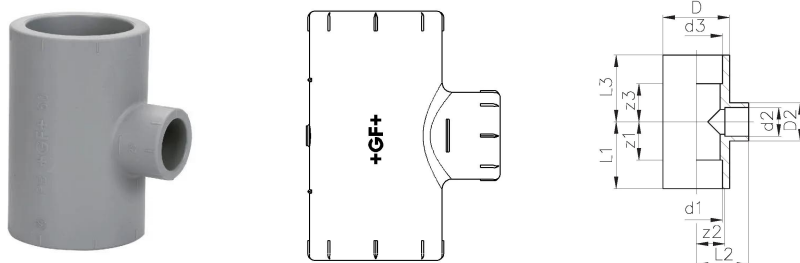

### About GF Instaflex tee reduced 90°

#### Specification

- The system is subject to constant inspection by internal and external bodies.
- These inspections range from quality assurance during production to ISO certification
- for environmental and process safety. The INSTAFLEX system meets all the essential
- requirements for building technology applications and is subject to constant monitoring by the
- licensing offices for drinking water, heating and compressed air installations on land and sea.

#### Application

Instaflex offers complete solutions for single-family homes, multi-family residential buildings, healthcare, education, industrial, or commercial building

##### Application areas

- hot & cold water, compressed air, cooling systems
- Surface and flush-mounted pipelines

#### Certification

- WRAS material approval (BS6920)

## GF Instaflex tee reduced 90° 40-25 40

1152209



### Measurements

Inner_diameter_di	40
Length (l2)	44
Length (l3)	44
Z Measurement d	51
Z Measurement d1	40
Z Measurement d2	25
Z Measurement d3	40
Z Measurement d3	40
Z Measurement D2	34
Z Measurement L1	44
z1	22
Z2	26
Z3	22

### Product code

Item no EAN	7611205819729
Item no GF	761066924
Item no GTIN	07611205819729
Item no RSK	1874842

### Dimensions

Item Unit Height	52
Item Unit Length	87
Item Unit Weight	0,077
Item Unit Width	72
Item_UOM	pce

### Packaging

Packaging GTIN PL1	06414900065412
Packaging Height PL1	80

Packaging Length PL1	190
Packaging Quantity PL1	5
Packaging Type PL1	Plastic_Bag
Packaging Volume PL1	0,002584
Packaging Weight PL1	0,395
Packaging Width PL1	170

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavillion  
WD18 8GA, Watford  
UK

T +44 (0)1923 381212  
E  
customerservice.uk.bfs@georgfi  
scher.com