


GF Instaflex tee reduced 90deg 50-25 50

1152210

- Made of Polybuten

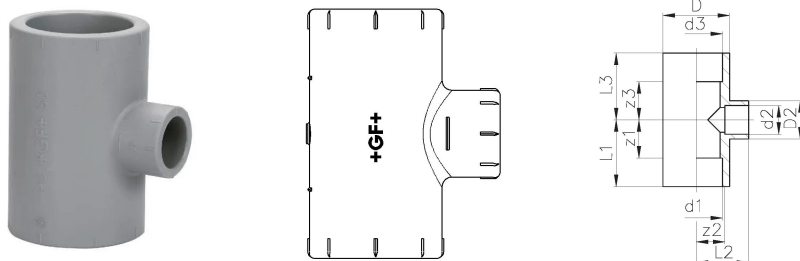

About GF Instaflex tee reduced 90deg

Specification

- The system is subject to constant inspection by internal and external bodies.
- These inspections range from quality assurance during production to ISO certification
- for environmental and process safety. The INSTAFLEX system meets all the essential
- requirements for building technology applications and is subject to constant monitoring by the
- licensing offices for drinking water, heating and compressed air installations on land and sea.

Application

Instaflex offers complete solutions for single-family homes, multi-family residential buildings, healthcare, education, industrial, or commercial building

Application areas

- hot & cold water, compressed air, cooling systems
- Surface and flush-mounted pipelines

Certification

- WRAS material approval (BS6920)

GF Instaflex tee reduced 90deg 50-25 50

1152210



Measurements

Inner_diameter_di	50
Length (l2)	51
Length (l3)	51
Z Measurement d2	25
z1	26
Z2	33
Z3	26

Product code

Item no EAN	7611205823467
Item no GF	761066925
Item no GTIN	07611205823467
Item no RSK	1874844

Dimensions

Item Unit Height	64
Item Unit Length	104
Item Unit Weight	0,131
Item Unit Width	84
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414900132381
Packaging GTIN PL4	06414900132398
Packaging Height PL1	82
Packaging Height PL4	950
Packaging Length PL1	307
Packaging Length PL4	1200
Packaging Quantity PL1	5
Packaging Quantity PL4	720

Packaging Type PL1	Plastic_Bag
Packaging Type PL4	Pallet
Packaging Volume PL1	0,004480972
Packaging Volume PL4	0,912
Packaging Weight PL1	0,674
Packaging Weight PL4	113
Packaging Width PL1	178
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb