


GF Instaflex cap Electro Fusion d16

1152352

- PN 16 at 20°C

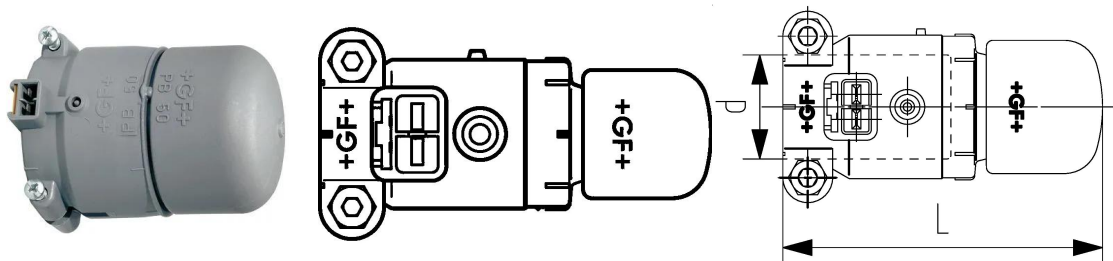

About GF Instaflex cap Electro Fusion

Specification

- The system is subject to constant inspection by internal and external bodies.
- These inspections range from quality assurance during production to ISO certification
- for environmental and process safety. The INSTAFLEX system meets all the essential
- requirements for building technology applications and is subject to constant monitoring by the
- licensing offices for drinking water, heating and compressed air installations on land and sea.

Application

Instaflex offers complete solutions for single-family homes, multi-family residential buildings, healthcare, education, industrial, or commercial building

Application areas

- hot & cold water, compressed air, cooling systems
- Surface and flush-mounted pipelines

Certification

- WRAS material approval (BS6920)

GF Instaflex cap Electro Fusion d16

1152352



Product code

Item no EAN	7611205820831
Item no GF	761069270
Item no GTIN	07611205820831
Item no LVI	2075392
Item no RSK	1874698

Dimensions

Item Unit Height	68
Item Unit Length	36
Item Unit Weight	0,022
Item Unit Width	39
Item_UOM	pce

Measurements

LENGTH_L	67
----------	----

Packaging

Packaging GTIN PL1	06414900112239
Packaging Height PL1	51
Packaging Length PL1	87
Packaging Quantity PL1	1
Packaging Type PL1	Plastic_Bag
Packaging Volume PL1	0,000248472
Packaging Weight PL1	0,029
Packaging Width PL1	56

Technical documents

Download documents here

E-enquiries.uk@uponor.com

www.uponor.com/en-gb