


GF Instaflex cap Electro Fusion d25

1152354

- PN 16 at 20°C

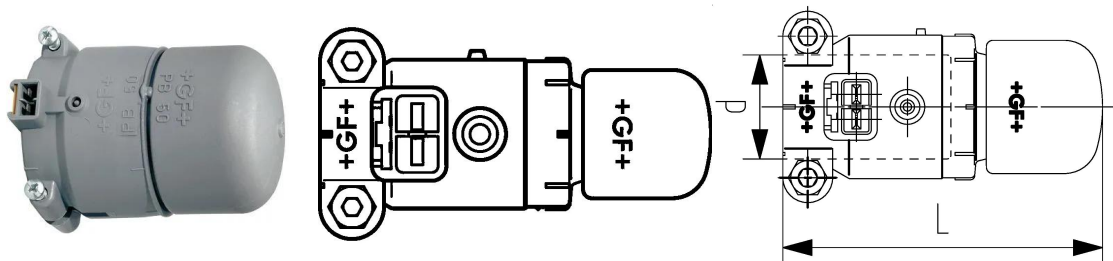

About GF Instaflex cap Electro Fusion

Specification

- The system is subject to constant inspection by internal and external bodies.
- These inspections range from quality assurance during production to ISO certification
- for environmental and process safety. The INSTAFLEX system meets all the essential
- requirements for building technology applications and is subject to constant monitoring by the
- licensing offices for drinking water, heating and compressed air installations on land and sea.

Application

Instaflex offers complete solutions for single-family homes, multi-family residential buildings, healthcare, education, industrial, or commercial building

Application areas

- hot & cold water, compressed air, cooling systems
- Surface and flush-mounted pipelines

Certification

- WRAS material approval (BS6920)

GF Instaflex cap Electro Fusion d25

1152354



Product code

Item no EAN	7611205823795
Item no GF	761069272
Item no GTIN	07611205823795
Item no RSK	1874700

Dimensions

Item Unit Height	79
Item Unit Length	46
Item Unit Weight	0,036
Item Unit Width	51
Item_UOM	pce

Measurements

LENGTH_L	77
----------	----

Packaging

Packaging GTIN PL1	06414900112253
Packaging Height PL1	56
Packaging Length PL1	105
Packaging Quantity PL1	1
Packaging Type PL1	Plastic_Bag
Packaging Volume PL1	0,00037632
Packaging Weight PL1	0,044
Packaging Width PL1	64

Technical documents

[Download documents here](#)

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb