


## GF Instaflex cap electrofusion d32

1152355

- PN 16 at 20°C

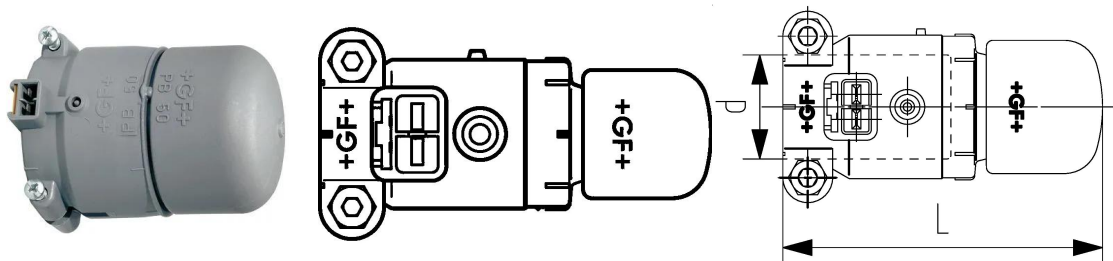

### About GF Instaflex cap electrofusion

#### Specification

- The system is subject to constant inspection by internal and external bodies.
- These inspections range from quality assurance during production to ISO certification
- for environmental and process safety. The INSTAFLEX system meets all the essential
- requirements for building technology applications and is subject to constant monitoring by the
- licensing offices for drinking water, heating and compressed air installations on land and sea.

#### Application

Instaflex offers complete solutions for single-family homes, multi-family residential buildings, healthcare, education, industrial, or commercial building

##### Application areas

- hot & cold water, compressed air, cooling systems
- Surface and flush-mounted pipelines

#### Certification

- WRAS material approval (BS6920)

## GF Instaflex cap electrofusion d32

1152355



### Product code

Item no EAN	7611205820848
Item no GF	761069273
Item no GTIN	07611205820848
Item no RSK	1874701

### Dimensions

Item Unit Height	86
Item Unit Length	54
Item Unit Weight	0,054
Item Unit Width	61
Item_UOM	pce

### Measurements

LENGTH_L	83
Z Measurement d	32

### Packaging

Packaging GTIN PL1	06414900112260
Packaging Height PL1	59
Packaging Length PL1	98
Packaging Quantity PL1	1
Packaging Type PL1	Plastic_Bag
Packaging Volume PL1	0,000387394
Packaging Weight PL1	0,062
Packaging Width PL1	67

### Technical documents

Download documents here

customerservice.uk.bfs@georgfischer.com