


GF Instaflex cap electrofusion d40

1152356

- PN 16 at 20°C

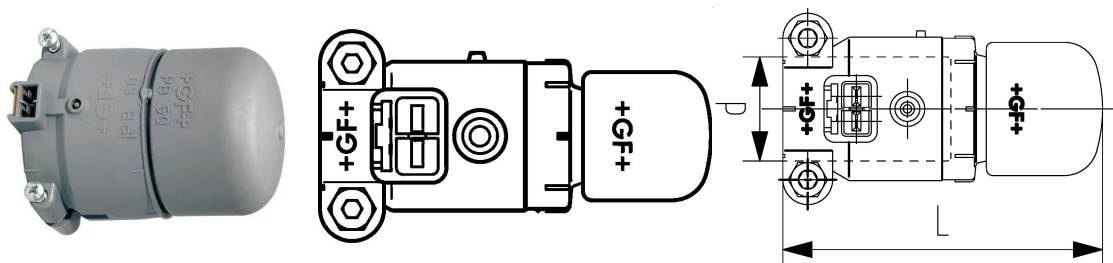

About GF Instaflex cap electrofusion

Specification

- The system is subject to constant inspection by internal and external bodies.
- These inspections range from quality assurance during production to ISO certification
- for environmental and process safety. The INSTAFLEX system meets all the essential
- requirements for building technology applications and is subject to constant monitoring by the
- licensing offices for drinking water, heating and compressed air installations on land and sea.

Application

Instaflex offers complete solutions for single-family homes, multi-family residential buildings, healthcare, education, industrial, or commercial building

Application areas

- hot & cold water, compressed air, cooling systems
- Surface and flush-mounted pipelines

Certification

- WRAS material approval (BS6920)

GF Instaflex cap electrofusion d40

1152356



Product code

Item no EAN	7611205820855
Item no GF	761069274
Item no GTIN	07611205820855
Item no LVI	2075302
Item no RSK	1874702

Dimensions

Item Unit Height	94
Item Unit Length	64
Item Unit Weight	0,095
Item Unit Width	67
Item_UOM	pce

Measurements

LENGTH_L	95
Z Measurement d	40

Packaging

Packaging GTIN PL1	06414900112277
Packaging Height PL1	72
Packaging Length PL1	113
Packaging Quantity PL1	1
Packaging Type PL1	Plastic_Bag
Packaging Volume PL1	0,000683424
Packaging Weight PL1	0,103
Packaging Width PL1	84

Technical documents

Download documents here

schcer.com

orgfi