


## GF Instaflex cap Electro Fusion d40

1152356

- PN 16 at 20°C

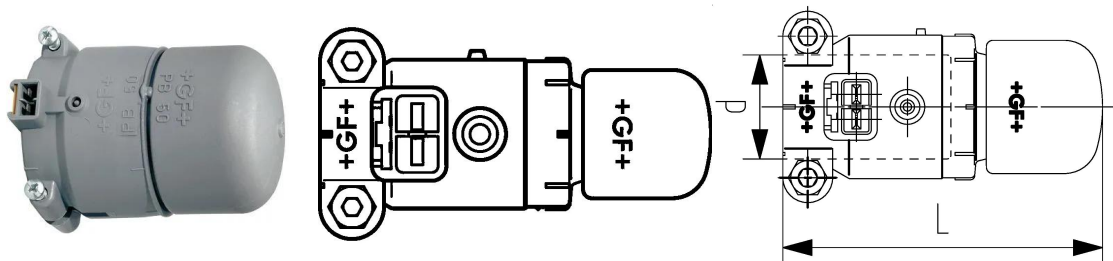

### About GF Instaflex cap Electro Fusion

#### Specification

- The system is subject to constant inspection by internal and external bodies.
- These inspections range from quality assurance during production to ISO certification
- for environmental and process safety. The INSTAFLEX system meets all the essential
- requirements for building technology applications and is subject to constant monitoring by the
- licensing offices for drinking water, heating and compressed air installations on land and sea.

#### Application

Instaflex offers complete solutions for single-family homes, multi-family residential buildings, healthcare, education, industrial, or commercial building

##### Application areas

- hot & cold water, compressed air, cooling systems
- Surface and flush-mounted pipelines

#### Certification

- WRAS material approval (BS6920)

## GF Instaflex cap Electro Fusion d40

1152356



### Product code

Item no EAN	7611205820855
Item no GF	761069274
Item no GTIN	07611205820855
Item no LVI	2075302
Item no RSK	1874702

### Dimensions

Item Unit Height	94
Item Unit Length	64
Item Unit Weight	0,095
Item Unit Width	67
Item_UOM	pce

### Measurements

LENGTH_L	95
----------	----

### Packaging

Packaging GTIN PL1	06414900112277
Packaging Height PL1	72
Packaging Length PL1	113
Packaging Quantity PL1	1
Packaging Type PL1	Plastic_Bag
Packaging Volume PL1	0,000683424
Packaging Weight PL1	0,103
Packaging Width PL1	84

### Technical documents

Download documents here

[E-enquiries.uk@uponor.com](mailto:E-enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)