


GF Instaflex flange adapter socket fusion FT 20x1/2"

1152573

- Socket fusion transition to male thread
- Thread in DZR brass, UBA listed
- Gasket: EPDM
- Material: PB, Brass
- Operating pressure: 16 bars

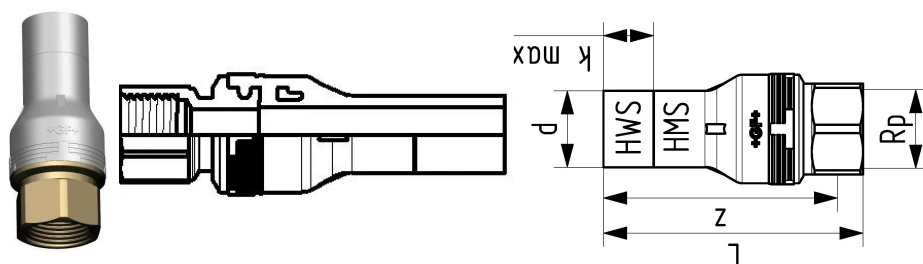

About GF Instaflex flange adapter socket fusion FT

Specification

- The system is subject to constant inspection by internal and external bodies.
- These inspections range from quality assurance during production to ISO certification for environmental and process safety. The INSTAFLEX system meets all the essential requirements for building technology applications and is subject to constant monitoring by the licensing offices for drinking water, heating and compressed air installations on land and sea.

Application

Instaflex offers complete solutions for single-family homes, multi-family residential buildings, healthcare, education, industrial, or commercial building

Application areas


- hot & cold water, compressed air, cooling systems
- Surface and flush-mounted pipelines

Certification

- WRAS material approval (BS6920)

GF Instaflex flange adapter socket fusion FT 20x1/2"

1152573

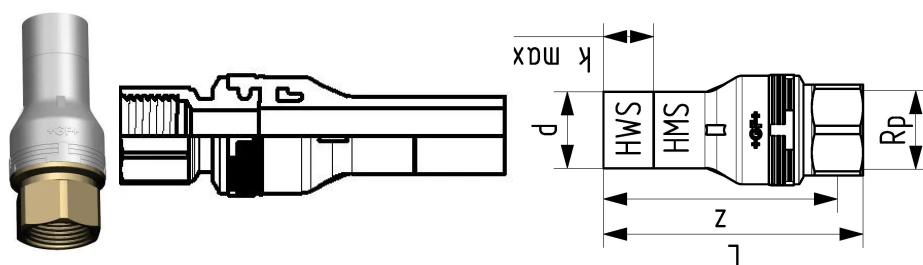

Product code

Item no EAN	7611205903374
Item no GF	761069676
Item no GTIN	07611205903374

Dimensions

Item Unit Height	107
Item Unit Length	31.2
Item Unit Weight	0,104
Item Unit Width	31.2
Item_UOM	pce

Measurements

LENGTH_L	100
Z	87

Packaging

Packaging GTIN PL1	06414900113373
Packaging Height PL1	50
Packaging Length PL1	150
Packaging Quantity PL1	1
Packaging Type PL1	Plastic_Bag
Packaging Volume PL1	0,000375
Packaging Weight PL1	0,109
Packaging Width PL1	50

Technical documents

[Download documents here](#)

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb