


## GF Instaflex adapter / flat seal 20x3/4" 94L

**1152582**

- Socket fusion transition to lose-nut adapter
- Thread in DZR brass, UBA listed
- Gasket: EPDM
- Material: PB, Brass
- PN 16 at 20°C

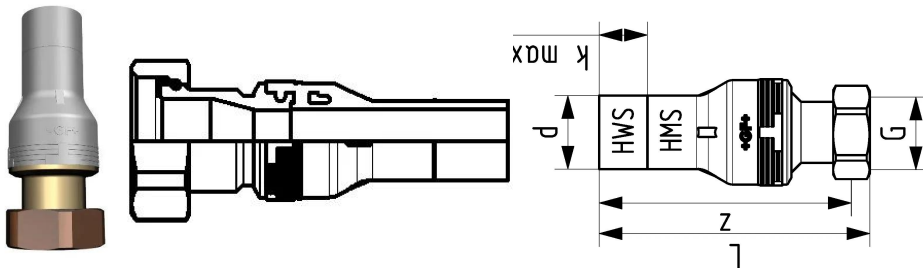

### About GF Instaflex adapter / flat seal

#### Specification

- The system is subject to constant inspection by internal and external bodies.
- These inspections range from quality assurance during production to ISO certification
- for environmental and process safety. The INSTAFLEX system meets all the essential
- requirements for building technology applications and is subject to constant monitoring by the
- licensing offices for drinking water, heating and compressed air installations on land and sea.

#### Application

Instaflex offers complete solutions for single-family homes, multi-family residential buildings, healthcare, education, industrial, or commercial building

##### Application areas

- hot & cold water, compressed air, cooling systems
- Surface and flush-mounted pipelines

#### Certification

- WRAS material approval (BS6920)

## GF Instaflex adapter / flat seal 20x3/4" 94L

1152582



### Product code

Item no EAN	7611205903534
Item no GF	761069685
Item no GTIN	07611205903534

### Dimensions

Item Unit Height	16.5
Item Unit Length	111.186
Item Unit Weight	0,158
Item Unit Width	16.5
Item_UOM	pce

### Measurements

LENGTH_L	102
Z	94

### Packaging

Packaging GTIN PL1	06414900113465
Packaging Height PL1	40
Packaging Length PL1	140
Packaging Quantity PL1	1
Packaging Type PL1	Plastic_Bag
Packaging Volume PL1	0,000224
Packaging Weight PL1	0,235
Packaging Width PL1	40

### Technical documents

[Download documents here](#)

T +44 (0)1923 381212  
 E  
[customerservice.uk.bfs@georgfischer.com](mailto:customerservice.uk.bfs@georgfischer.com)