


GF Instaflex adapter / flat seal 25x1 1/4"

1152586

- Socket fusion transition to lose-nut adapter
- Thread in DZR brass, UBA listed
- Gasket: EPDM
- Material: PB, Brass
- PN 16 at 20°C

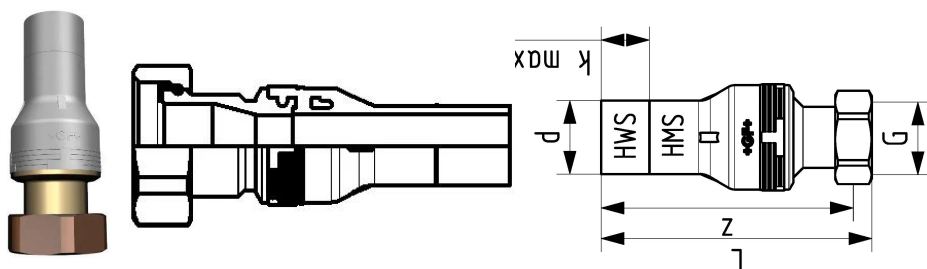

About GF Instaflex adapter / flat seal

Specification

- The system is subject to constant inspection by internal and external bodies.
- These inspections range from quality assurance during production to ISO certification for environmental and process safety. The INSTAFLEX system meets all the essential requirements for building technology applications and is subject to constant monitoring by the licensing offices for drinking water, heating and compressed air installations on land and sea.

Application

Instaflex offers complete solutions for single-family homes, multi-family residential buildings, healthcare, education, industrial, or commercial building

Application areas

- hot & cold water, compressed air, cooling systems
- Surface and flush-mounted pipelines

Certification

- WRAS material approval (BS6920)

GF Instaflex adapter / flat seal 25x1 1/4"

1152586



Status

Item Available From date

2025-09-05

Product code

Item no EAN

7611205903633

Item no GF

761069689

Item no GTIN

07611205903633

Dimensions

Item Unit Height

50

Item Unit Length

133.2

Item Unit Weight

0,274

Item Unit Width

50

Item_UOM

pce

Measurements

LENGTH_L

118

Z

109

Packaging

Packaging GTIN PL1

06414900113502

Packaging Height PL1

80

Packaging Length PL1

150

Packaging Quantity PL1

1

Packaging Type PL1

Plastic_Bag

Packaging Volume PL1

0,00096

Packaging Weight PL1

0,279

Packaging Width PL1

80

Technical documents

Download documents here

www.uponor.com