
Product data sheet



GF Instaflex adapter / flat seal 50x1 3/4"

1152593

- Socket fusion transition to lose-nut adapter
- Thread in DZR brass, UBA listed
- Gasket: EPDM
- Material: PB, Brass
- PN 16 at 20°C

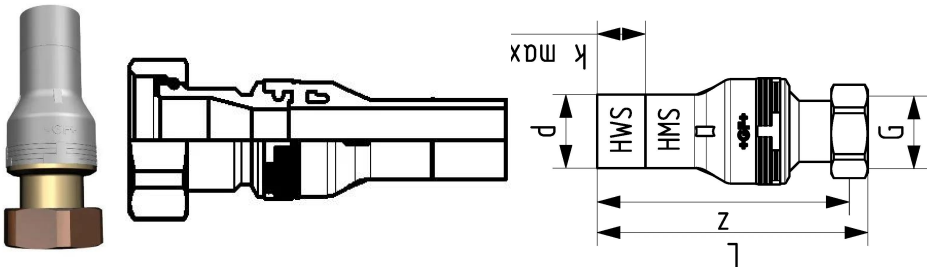

About GF Instaflex adapter / flat seal

Specification

- The system is subject to constant inspection by internal and external bodies.
- These inspections range from quality assurance during production to ISO certification for environmental and process safety.
- The INSTAFLEX system meets all the essential requirements for building technology applications and is subject to constant monitoring by the licensing offices for drinking water, heating and compressed air installations on land and sea.

Application

Instaflex offers complete solutions for single-family homes,
multi-family residfential buildings, healthcare, eduacation,
industrial, or commercial building


Application areas
- hot & cold water, compressed air, cooling systems
- Surface and flush-mounted pipelines

Certification

- WRAS material approval (BS6920)

GF Instaflex adapter / flat seal 50x1 3/4"

1152593

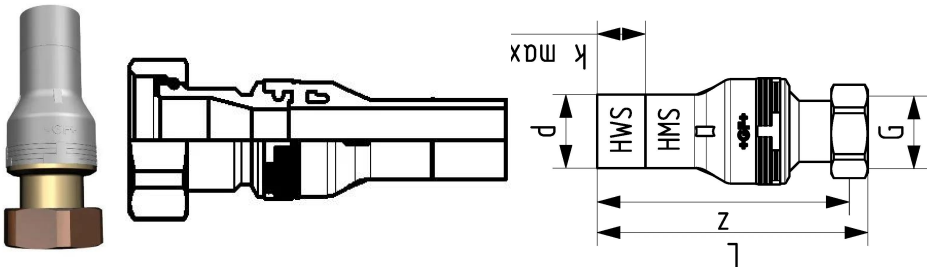

Measurements

Cylindric_thread_G	1 3/4"
LENGTH_L	142
Z Measurement d	50
Z Measurement L	142
Z	131

Status

Item Available From date	2025-09-05

Product code

Item no EAN	7611205903732
Item no GF	761069696
Item no GTIN	07611205903732

Dimensions

Item Unit Height	65.7
Item Unit Length	144.6
Item Unit Weight	0,607
Item Unit Width	65.7
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414900113571
Packaging Height PL1	80
Packaging Length PL1	150
Packaging Quantity PL1	1
Packaging Type PL1	Plastic_Bag
Packaging Volume PL1	0,00096
Packaging Weight PL1	0,617

Packaging Width PL1	80

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+