


GF Instaflex adapter FT d40

1152605

- Socket fusion transition to female thread
- Thread in DZR brass, UBA listed
- Gasket: EPDM
- Material: PB, Brass

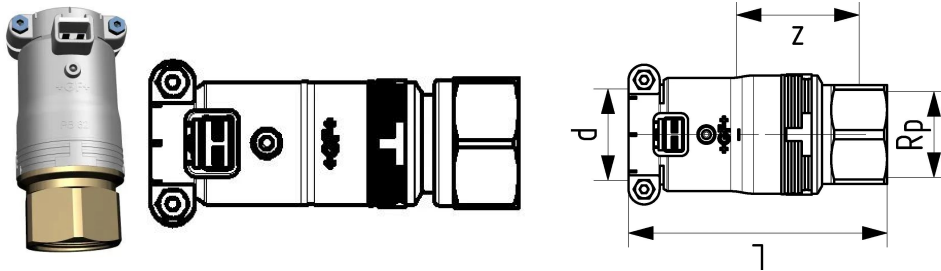

About GF Instaflex adapter FT

Specification

- The system is subject to constant inspection by internal and external bodies.
- These inspections range from quality assurance during production to ISO certification
- for environmental and process safety. The INSTAFLEX system meets all the essential
- requirements for building technology applications and is subject to constant monitoring by the
- licensing offices for drinking water, heating and compressed air installations on land and sea.

Application

Instaflex offers complete solutions for single-family homes, multi-family residential buildings, healthcare, education, industrial, or commercial building

Application areas

- hot & cold water, compressed air, cooling systems
- Surface and flush-mounted pipelines

Certification

- WRAS material approval (BS6920)

GF Instaflex adapter FT d40

1152605



Product code

Item no EAN	7611205903527
Item no GF	761069708
Item no GTIN	07611205903527

Dimensions

Item Unit Height	66
Item Unit Length	120
Item Unit Weight	0,424
Item Unit Width	64
Item_UOM	pce

Measurements

LENGTH_L	119
Z	51

Packaging

Packaging GTIN PL1	06414900113687
Packaging Height PL1	80
Packaging Length PL1	122
Packaging Quantity PL1	1
Packaging Type PL1	Plastic_Bag
Packaging Volume PL1	0,0007808
Packaging Weight PL1	0,442
Packaging Width PL1	80

Technical documents

[Download documents here](#)

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb