


GF Instaflex transition d32

1152671

- Material: V4A / 316L
- PN 16 at 20°C

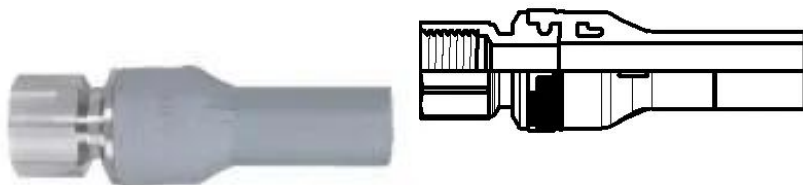

About GF Instaflex transition

Specification

- The system is subject to constant inspection by internal and external bodies.
- These inspections range from quality assurance during production to ISO certification
- for environmental and process safety. The INSTAFLEX system meets all the essential
- requirements for building technology applications and is subject to constant monitoring by the
- licensing offices for drinking water, heating and compressed air installations on land and sea.

Application

Instaflex offers complete solutions for single-family homes, multi-family residential buildings, healthcare, education, industrial, or commercial building

Application areas


- hot & cold water, compressed air, cooling systems
- Surface and flush-mounted pipelines

Certification

- WRAS material approval (BS6920)

GF Instaflex transition d32

1152671

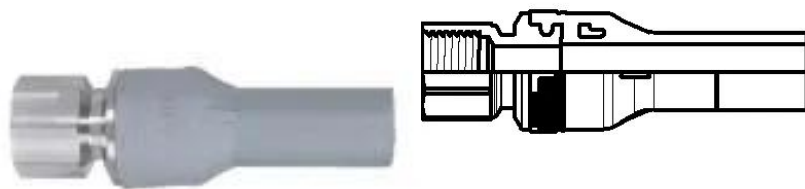

Product code

Item no EAN	7611205910617
Item no GF	761069776
Item no GTIN	07611205910617

Dimensions

Item Unit Height	46.2
Item Unit Length	109
Item Unit Weight	0,21
Item Unit Width	46.2
Item_UOM	pce

Measurements

Length (l1)	43
Length (l2)	16

Packaging

Packaging GTIN PL1	06414900114103
Packaging Height PL1	47
Packaging Length PL1	109
Packaging Quantity PL1	1
Packaging Type PL1	Plastic_Bag
Packaging Volume PL1	0,000240781
Packaging Weight PL1	0,212
Packaging Width PL1	47

Technical documents

[Download documents here](#)

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb