


GF Malleable Fittings long sweep bend 41 45deg 1 1/2 G

1152882

- Long sweep bend 45°, ISO/EN G1/45°
- Female / female

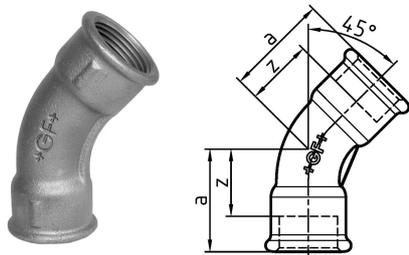

About GF Malleable Fittings long sweep bend 41 45deg

Specification


- Unique Whiteheart ductile Cast Iron to EN-GJMW-400-5 to BS EN 1562, design symbol A
- Thread type BSP - R or Rp to BS EN 10226-1 / ISO 7-1
- Union or flat-nut thread types to BS EN 228-1
- Manufactured to BS EN 10242 (ISO 49)
- Cast Iron is fire class A1 to BS EN 13501-1 (CWFT) acc. to Commission Decision 96/603/EC (as amended)
- Natural Black or Galvanized (99.995 zinc)
- Coated with medical-grade oil for corrosion protection
- Suitable for systems covered by the Pressure Equipment Safety Regulation:2016
- Max. pressure 25 bar up to 120 degrees, between 120-300 degrees use interpolated values, Max. 20bar at 300 degrees
- Sizes from 1/4" to 4"

Application

- Heating - LTHW, MTHW and HTHW
- Steam
- Chilled water and cooling applications
- Compressed air
- Fuel gases
- Fuel oils
- Fire defence / sprinklers

GF Malleable Fittings long sweep bend 41 45deg 1 1/2 G

1152882

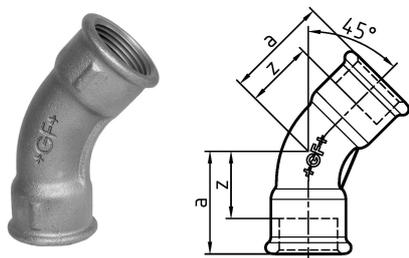

Status

Item Available From date 2025-09-05

Product code

Item no EAN	7611205404826
Item no GF	770041208
Item no GTIN	07611205404826
Item no NOBB	60638855
Item no NRF	1366587
Item no RSK	1266527
Item no VVS	004041411

Dimensions

Item Unit Height	62
Item Unit Length	98
Item Unit Weight	0,7609
Item Unit Width	136
Item_UOM	pce

Packaging

Packaging GTIN PL1	07611205204822
Packaging GTIN PL4	06414900242158
Packaging Height PL1	200
Packaging Height PL4	729
Packaging Length PL1	260
Packaging Length PL4	1200
Packaging Quantity PL1	12
Packaging Quantity PL4	648
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00988

Packaging Volume PL4	0,69984
Packaging Weight PL1	9,3448
Packaging Weight PL4	513,0632
Packaging Width PL1	190
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb