


GF Malleable Fittings 130 - tee, black 3

1153282

- Tee, equal, ISO/EN B1

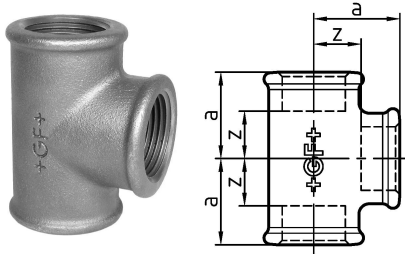

About GF Malleable Fittings 130 - tee, black

Specification


- Unique Whiteheart ductile Cast Iron to EN-GJMW-400-5 to BS EN 1562, design symbol A
- Thread type BSP - R or Rp to BS EN 10226-1 / ISO 7-1
- Union or flat-nut thread types to BS EN 228-1
- Manufactured to BS EN 10242 (ISO 49)
- Cast Iron is fire class A1 to BS EN 13501-1 (CWFT) acc. to Commission Decision 96/603/EC (as amended)
- Natural Black or Galvanized (99.995 zinc)
- Coated with medical-grade oil for corrosion protection
- Suitable for systems covered by the Pressure Equipment Safety Regulation:2016
- Max. pressure 25 bar up to 120 degrees, between 120-300 degrees use interpolated values, Max. 20bar at 300 degrees
- Sizes from 1/4" to 4"

Application

- Heating - LTHW, MTHW and HTHW
- Steam
- Chilled water and cooling applications
- Compressed air
- Fuel gases
- Fuel oils
- Fire defence / sprinklers

GF Malleable Fittings 130 - tee, black 3

1153282

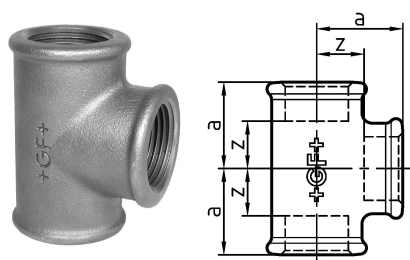

Product code

Item no EAN	7611205313135
Item no GF	770130111
Item no GTIN	07611205313135
Item no NOBB	60672602
Item no NRF	1387709
Item no RSK	1276104
Item no VVS	004130114

Dimensions

Item Unit Height	107
Item Unit Length	132
Item Unit Weight	2,784
Item Unit Width	156
Item_UOM	pce

Packaging

Packaging GTIN PL1	07611205113131
Packaging GTIN PL4	06414900182577
Packaging Height PL1	200
Packaging Height PL4	729
Packaging Length PL1	385
Packaging Length PL4	1200
Packaging Quantity PL1	5
Packaging Quantity PL4	135
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,019635
Packaging Volume PL4	0,69984
Packaging Weight PL1	14,34

Packaging Weight PL4	395,84
Packaging Width PL1	255
Packaging Width PL4	800
Measurements	
Z Measurement a	78
Z Measurement a	78
Z Measurement d	3
Z	48

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E
customerservice.uk.bfs@georgfi
scher.com