


## GF Malleable Fittings pitcher tee reducer 131 2 - 1/2 B

**1153526**

- Pitchwer tee, reducing on the branch, ISO/EN E1
- Swept tee to improve flow, especially on return lines

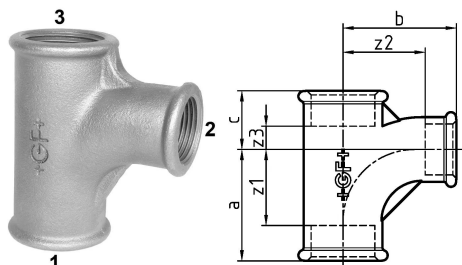

### About GF Malleable Fittings pitcher tee reducer 131

#### Specification

- Unique Whiteheart ductile Cast Iron to EN-GJMW-400-5 to BS EN 1562, design symbol A
- Thread type BSP - R or Rp to BS EN 10226-1 / ISO 7-1
- Union or flat-nut thread types to BS EN 228-1
- Manufactured to BS EN 10242 (ISO 49)
- Cast Iron is fire class A1 to BS EN 13501-1 (CWFT) acc. to Commission Decision 96/603/EC (as amended)
- Natural Black or Galvanized (99.995 zinc)
- Coated with medical-grade oil for corrosion protection
- Suitable for systems covered by the Pressure Equipment Safety Regulation:2016
- Max. pressure 25 bar up to 120 degrees, between 120-300 degrees use interpolated values, Max. 20bar at 300 degrees
- Sizes from 1/4" to 4"

#### Application

- Heating - LTHW, MTHW and HTHW
- Steam
- Chilled water and cooling applications
- Compressed air
- Fuel gases
- Fuel oils
- Fire defence / sprinklers

## GF Malleable Fittings pitcher tee reducer 131 2 - 1/2 B

1153526



### Product code

Item no EAN	7611205316594
Item no GF	770131137
Item no GTIN	07611205316594
Item no RSK	1280129

### Dimensions

Item Unit Height	75
Item Unit Length	139
Item Unit Weight	0,76
Item Unit Width	86
Item_UOM	pce

### Packaging

Packaging GTIN PL1	07611205116590
Packaging GTIN PL4	06414900181297
Packaging Height PL1	200
Packaging Height PL4	729
Packaging Length PL1	260
Packaging Length PL4	1200
Packaging Quantity PL1	10
Packaging Quantity PL4	540
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00988
Packaging Volume PL4	0,69984
Packaging Weight PL1	7,814
Packaging Weight PL4	430,4
Packaging Width PL1	190
Packaging Width PL4	800

## Measurements

z1	30
Z2	51
Z3	8

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)