


## GF Malleable Fittings 241 - reducing bush, black 4 - 2

**1153796**

- Reducing bush, ISO/EN N4
- Forms I, II, III are available only as marked under column "Form", Form I can also be supplied
- with continuous internal thread (=241D).
- ST ... these types of fittings are made from steel (galvanised finish = electroplated) and not
- suitable for drinking water installations.

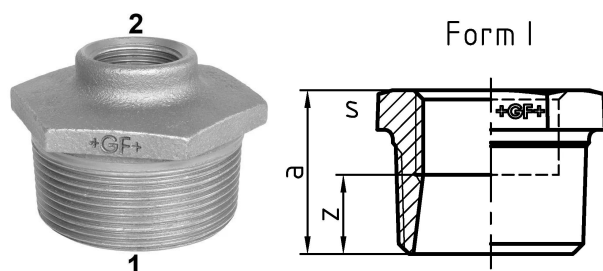

### About GF Malleable Fittings 241 - reducing bush, black

#### Specification

- Unique Whiteheart ductile Cast Iron to EN-GJMW-400-5 to BS EN 1562, design symbol A
- Thread type BSP - R or Rp to BS EN 10226-1 / ISO 7-1
- Union or flat-nut thread types to BS EN 228-1
- Manufactured to BS EN 10242 (ISO 49)
- Cast Iron is fire class A1 to BS EN 13501-1 (CWFT) acc. to Commission Decision 96/603/EC (as amended)
- Natural Black or Galvanized (99.995 zinc)
- Coated with medical-grade oil for corrosion protection
- Suitable for systems covered by the Pressure Equipment Safety Regulation:2016
- Max. pressure 25 bar up to 120 degrees, between 120-300 degrees use interpolated values, Max. 20bar at 300 degrees
- Sizes from 1/4" to 4"

#### Application

- Heating - LTHW, MTHW and HTHW
- Steam
- Chilled water and cooling applications
- Compressed air
- Fuel gases
- Fuel oils
- Fire defence / sprinklers

## GF Malleable Fittings 241 - reducing bush, black 4 - 2

1153796



## Product code

|              |                |
|--------------|----------------|
| Item no EAN  | 7611205325909  |
| Item no GF   | 770241151      |
| Item no GTIN | 07611205325909 |
| Item no RSK  | 1318145        |
| Item no VVS  | 004241191      |

## Dimensions

|                  |       |
|------------------|-------|
| Item Unit Height | 120   |
| Item Unit Length | 138   |
| Item Unit Weight | 1,591 |
| Item Unit Width  | 69    |
| Item_UOM         | pce   |

## Packaging

|                        |                |
|------------------------|----------------|
| Packaging GTIN PL1     | 07611205125905 |
| Packaging GTIN PL4     | 06414900122207 |
| Packaging Height PL1   | 200            |
| Packaging Height PL4   | 729            |
| Packaging Length PL1   | 260            |
| Packaging Length PL4   | 1200           |
| Packaging Quantity PL1 | 6              |
| Packaging Quantity PL4 | 324            |
| Packaging Type PL1     | Base_Box       |
| Packaging Type PL4     | Pallet         |
| Packaging Volume PL1   | 0,00988        |
| Packaging Volume PL4   | 0,69984        |
| Packaging Weight PL1   | 9,76           |
| Packaging Weight PL4   | 535,484        |
| Packaging Width PL1    | 190            |

|                     |     |
|---------------------|-----|
| Packaging Width PL4 | 800 |
| <b>Measurements</b> |     |
| Wall thickness_s    | 120 |
| Z Measurement a     | 51  |
| Z Measurement a     | 51  |
| Z Measurement b     | 69  |
| Z MEASUREMENT S     | 120 |
| Z                   | 45  |

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavillion  
WD18 8GA, Watford  
UK

T +44 (0)1923 381212  
E  
customerservice.uk.bfs@georgfi  
scher.com