


GF Malleable Fittings socket reduced 246 1/2 - 3/8 G

1153947

Socket, reducing, ISO/EN M4

- ST ... these types of fittings are made from steel (galvanised finish = electroplated) and not suitable for drinking water installations. Steel parts are hexagonal instead of beaded at the end no. 1.

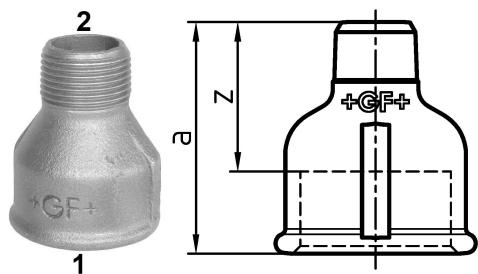

About GF Malleable Fittings socket reduced 246

Specification


- With their extensive history and tradition, malleable cast iron fittings are the most common pipe fittings. Because of their durability and mechanical strength, these fittings are very popular. The material is able to endure high mechanical stress and when combined with the standardized jointing method can be used in a wide range of applications.

Application

- Sanitary, heating and gas installation, mechanical engineering (oil, cool pipework), construction of petrol stations (gas lines), sprinkler

GF Malleable Fittings socket reduced 246 1/2 - 3/8 G

1153947

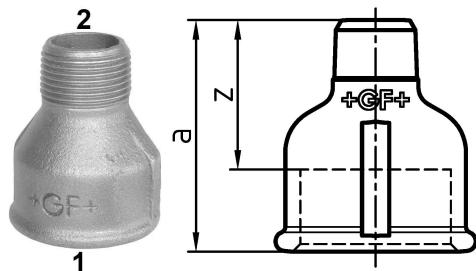

Status

Item Available From date 2025-09-05

Product code

Item no EAN 7611205426712

Item no GF 770246218

Item no GTIN 07611205426712

Item no RSK 1363679

Item no VVS 004246426

Dimensions

Item Unit Height 32

Item Unit Length 32

Item Unit Weight 0,088

Item Unit Width 43

Item_UOM pce

Packaging

Packaging GTIN PL1 07611205626716

Packaging GTIN PL2 07611205226718

Packaging GTIN PL4 06414900124591

Packaging Height PL1 32

Packaging Height PL2 100

Packaging Height PL4 508

Packaging Length PL1 155

Packaging Length PL2 260

Packaging Length PL4 1200

Packaging Quantity PL1 10

Packaging Quantity PL2 80

Packaging Quantity PL4 5760

Packaging Type PL1 Plastic_Bag

Packaging Type PL2	Medium_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0026288
Packaging Volume PL2	0,00494
Packaging Volume PL4	0,48768
Packaging Weight PL1	0,89
Packaging Weight PL2	7,22
Packaging Weight PL4	544,84
Packaging Width PL1	530
Packaging Width PL2	190
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb