


## GF Malleable Fittings 260 - socket eccentric, reduced, black 1 1/4 - 1/2

1153973

- Socket eccentric, reducing

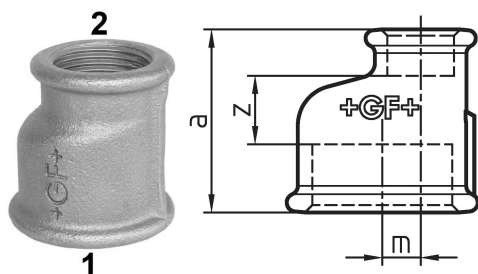

### About GF Malleable Fittings 260 - socket eccentric, reduced, black

#### Specification

- Unique Whiteheart ductile Cast Iron to EN-GJMW-400-5 to BS EN 1562, design symbol A
- Thread type BSP - R or Rp to BS EN 10226-1 / ISO 7-1
- Union or flat-nut thread types to BS EN 228-1
- Manufactured to BS EN 10242 (ISO 49)
- Cast Iron is fire class A1 to BS EN 13501-1 (CWFT) acc. to Commission Decision 96/603/EC (as amended)
- Natural Black or Galvanized (99.995 zinc)
- Coated with medical-grade oil for corrosion protection
- Suitable for systems covered by the Pressure Equipment Safety Regulation:2016
- Max. pressure 25 bar up to 120 degrees, between 120-300 degrees use interpolated values, Max. 20bar at 300 degrees
- Sizes from 1/4" to 4"

#### Application

- Heating - LTHW, MTHW and HTHW
- Steam
- Chilled water and cooling applications
- Compressed air
- Fuel gases
- Fuel oils
- Fire defence / sprinklers

## GF Malleable Fittings 260 - socket eccentric, reduced, black 1 1/4 - 1/2

1153973



### Product code

Item no EAN	7611205327224
Item no GF	770260117
Item no GTIN	07611205327224
Item no RSK	1363709
Item no VVS	004260149

### Dimensions

Item Unit Height	55
Item Unit Length	55
Item Unit Weight	0,24
Item Unit Width	50
Item_UOM	pce

### Measurements

Metric thread M	11,0
Z Measurement a	50
Z Measurement a	50
Z	18

### Packaging

Packaging GTIN PL1	07611205127220
Packaging GTIN PL4	06414900121682
Packaging Height PL1	200
Packaging Height PL4	729
Packaging Length PL1	260
Packaging Length PL4	1200
Packaging Quantity PL1	40
Packaging Quantity PL4	2160
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet

Packaging Volume PL1	0,00988
Packaging Volume PL4	0,69984
Packaging Weight PL1	9,814
Packaging Weight PL4	538,4
Packaging Width PL1	190
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavillion  
WD18 8GA, Watford  
UK

T +44 (0)1923 381212  
E  
customerservice.uk.bfs@georgfi  
scher.com