Product data sheet




GF Malleable Fittings 270 - socket, galvanized 4

1154028

- Socket, ISO/EN M2

- ST ... these types of fittings are made from steel (galvanised finish = electroplated) and not suitable for drinking water installations. Steel parts are hexagonal instead of beaded.



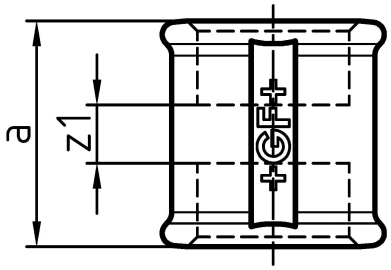

About GF Malleable Fittings socket

Specification

- Unique Whiteheart ductile Cast Iron to EN-GJMW-400-5 to BS EN 1562, design symbol A
- Thread type BSP - R or Rp to BS EN 10226-1 / ISO 7-1
- Union or flat-nut thread types to BS EN 228-1
- Manufactured to BS EN 10242 (ISO 49)
- Cast Iron is fire class A1 to BS EN 13501-1 (CWFT) acc. to Commission Decision 96/603/EC (as amended)
- Natural Black or Galvanized (99.995 zinc)
- Coated with medical-grade oil for corrosion protection
- Suitable for systems covered by the Pressure Equipment Safety Regulation:2016
- Max. pressure 25 bar up to 120 degrees, between 120-300 degrees use interpolated values, Max. 20bar at 300 degrees
- Sizes from ¼" to 4"


Application

- Heating - LTHW, MTHW and HTHW
- Steam
- Chilled water and cooling applications
- Compressed air
- Fuel gases
- Fuel oils
- Fire defence / sprinklers

GF Malleable Fittings 270 - socket, galvanized 4

1154028



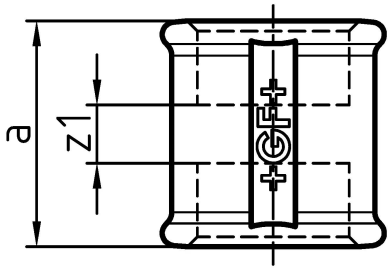

Product code

Item no EAN	7611205428433
Item no GF	770270212
Item no GTIN	07611205428433
Item no LVI	0855171
Item no NOBB	60639146
Item no NRF	1366878
Item no RSK	1311273
Item no VVS	004270416

Dimensions

Item Unit Height	135
Item Unit Length	135
Item Unit Weight	1,97
Item Unit Width	94
Item_UOM	pce

Packaging

Packaging GTIN PL1	07611205228439
Packaging GTIN PL4	06414900124102
Packaging Height PL1	200
Packaging Height PL4	729
Packaging Length PL1	385
Packaging Length PL4	1200
Packaging Quantity PL1	4
Packaging Quantity PL4	108
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet

Packaging Volume PL1	0,019635
Packaging Volume PL4	0,69984
Packaging Weight PL1	8,3
Packaging Weight PL4	232,76
Packaging Width PL1	255
Packaging Width PL4	800

Measurements

Z Measurement A	94
Z Measurement d	4
z1	22

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+