


GF Malleable Fittings plug 294 1 1/4 G

1154175

- Plug
- Square nut with pre-drilled hole

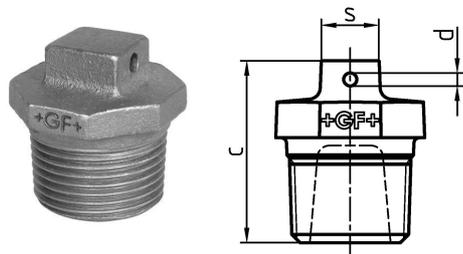

About GF Malleable Fittings plug 294

Specification


- Unique Whiteheart ductile Cast Iron to EN-GJMW-400-5 to BS EN 1562, design symbol A
- Thread type BSP - R or Rp to BS EN 10226-1 / ISO 7-1
- Union or flat-nut thread types to BS EN 228-1
- Manufactured to BS EN 10242 (ISO 49)
- Cast Iron is fire class A1 to BS EN 13501-1 (CWFT) acc. to Commission Decision 96/603/EC (as amended)
- Natural Black or Galvanized (99.995 zinc)
- Coated with medical-grade oil for corrosion protection
- Suitable for systems covered by the Pressure Equipment Safety Regulation:2016
- Max. pressure 25 bar up to 120 degrees, between 120-300 degrees use interpolated values, Max. 20bar at 300 degrees
- Sizes from 1/4" to 4"

Application

- Heating - LTHW, MTHW and HTHW
- Steam
- Chilled water and cooling applications
- Compressed air
- Fuel gases
- Fuel oils
- Fire defence / sprinklers

GF Malleable Fittings plug 294 1 1/4 G

1154175

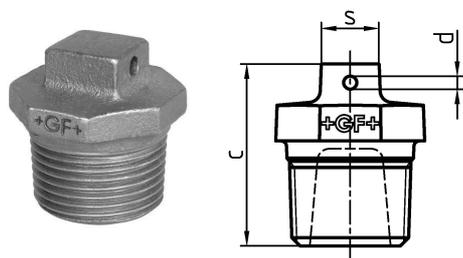

Status

Item Available From date

2025-09-05

Product code

Item no EAN	7611205430535
Item no GF	770294207
Item no GTIN	07611205430535
Item no RSK	1254037
Item no VVS	004294410

Dimensions

Item Unit Height	45
Item Unit Length	49
Item Unit Weight	0,2377
Item Unit Width	47
Item_UOM	pce

Packaging

Packaging GTIN PL1	07611205230531
Packaging GTIN PL4	06414900241939
Packaging Height PL1	200
Packaging Height PL4	534
Packaging Length PL1	260
Packaging Length PL4	1200
Packaging Quantity PL1	70
Packaging Quantity PL4	2520
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00988
Packaging Volume PL4	0,51264
Packaging Weight PL1	16,853

Packaging Weight PL4	619,004
Packaging Width PL1	190
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb